



TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	08W-2
Installation torque:	39-51 Nm
Weight:	0.13 kg
Fluids-Temperatures:	-40 to 120 °C
Internal Leakage Approximately:	0.15 cc/minute (3 drops/minute) max. at 350 bar
Filtration:	25 µm nominal or better
Minimum Voltage Required:	90 % of nominal
Coils must be ordered separately	
Mounting Position:	unrestricted

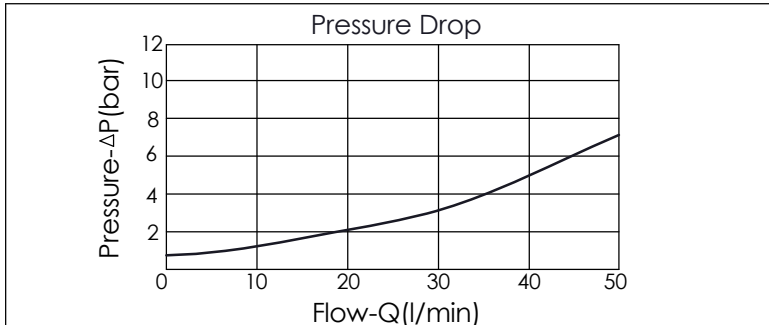

The curve is only for reference. Please kindly contact Winner if you need detailed information.

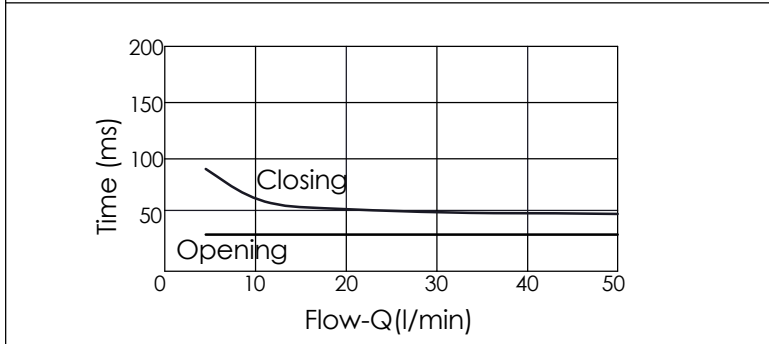

Y	OPERATION
32	Normally-Open Double Lock

X	STRUCTURE
2A	2 Ports · 20 Watt. Coil ∅ 12.7 mm tube

Z	OPTIONS
N	Non-adjustable
P	Push Style Manual Override
T	Push and Twist Style Manual Override