

**SOLENOID OPERATED VALVES
 POPPET 2-WAY NORMALLY OPEN
 COMMON CAVITY**


▶ **OD. 15.06.18 -1A - S0**

VEI-8A-2A-06-NA-S-NSS

SIZE 08

OD.15.06.18 - Y - S0



PATENT PENDING

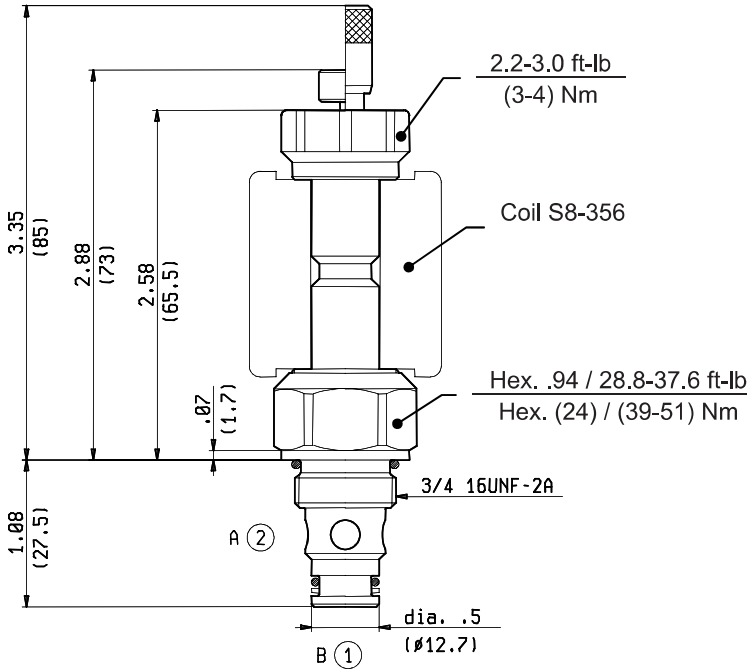

Inches
(mm)

TECHNICAL DATA

| | |
|--|----------------------|
| Maximum Operating Pressure | 5000 psi (350 bar) |
| Fatigue Cycle Life at 5000 psi (350 bar) and 0.5 Hz (1 s ON - 1 s OFF) | 10 million cycles |
| Rated Flow | 11 gpm (40 l/min) |
| Cavity - Tooling (CA-08A-2N) | page CT.A.001.U |
| Line bodies | page MN2.A... |
| Weight | 0.286 lbs (0.130 kg) |
| Fluids - Temperatures | page 7.01.040 |
| Testing Conditions - Seals | page 7.01.040 |
| Internal Leakage | page 7.01.040 |
| Filtration : 25 µm nominal or better | page 7.01.050 |
| Minimum Voltage Required | 90% of nominal |
| Coils must be ordered separately | page 1.71.042 |
| Mounting Position | unrestricted |

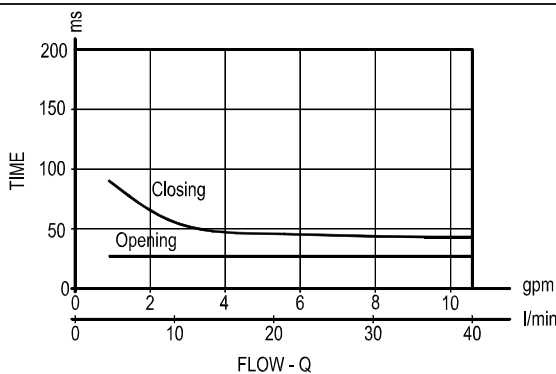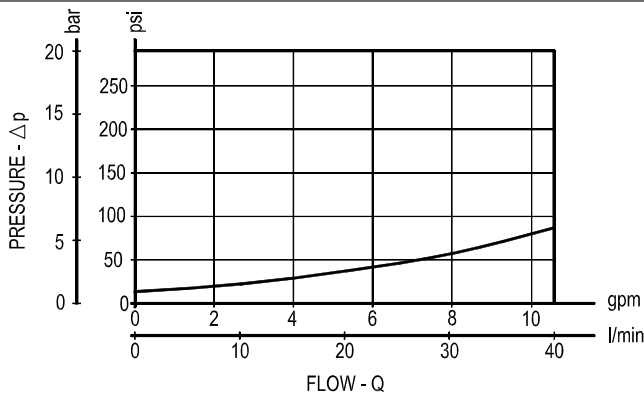

Y ORDERING OPTIONS

| | | |
|-----------|--------------------------------------|--|
| 1A | Standard | |
| 1B | Push Style Manual Override | |
| 1C | Push and Twist Style Manual Override | |