



Ordering Code: **CO-19A-X-Y-Z**

UNIT:mm

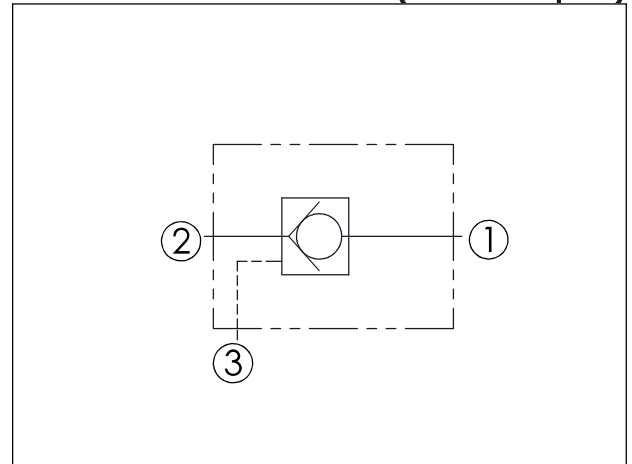

| TECHNICAL DATA       |            |       |
|----------------------|------------|-------|
| Max. pressure:       | 350        | bar   |
| Rated flow:          | 480        | l/min |
| Cavity-Tooling:      | 19A-3      |       |
| Installation torque: | 465-500    | Nm    |
| Weight:              | 1.19 (Z:N) | kg    |

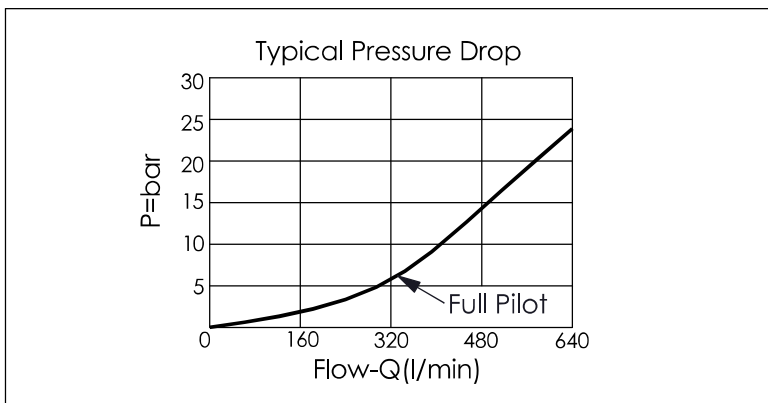

| X         | OPERATION  |  |
|-----------|--|--|
| <b>30</b> | 2 to 1 (Free Flow)<br>Pilot Ratio 3:1                        |  |
| <b>3C</b> | 2 to 1 (Free Flow)<br>Sealed Pilot Piston<br>Pilot Ratio 3:1 |  |

| Y          | SPRINGS           |  |
|------------|-------------------|--|
|            | Cracking pressure |  |
| <b>015</b> | 0.15 bar          |  |
| <b>03</b>  | 0.3 bar           |  |
| <b>10</b>  | 1.0 bar           |  |
| <b>20</b>  | <b>2.0 bar</b>    |  |
| <b>35</b>  | 3.5 bar           |  |
| <b>50</b>  | 5.0 bar           |  |
| <b>70</b>  | 7.0 bar           |  |

| Z        | OPTION                |  |
|----------|-----------------------|--|
| <b>N</b> | <b>Non-adjustable</b> |  |