

Data Sheet

# Heavy-Duty Pressure Transmitter

## MBS2250 DIN



### Principle of Operation

The pressure transmitter converts measured pressure into a linear temperature compensated output signal that is proportional to the transmitter supply voltage. The output signal varies between 10 and 90% of the supply voltage.

This output signal is well suited for direct connection to an A/D converter provided that the transmitter and the ratiometrically coupled A/D converter use the same voltage reference. Danfoss PLUS+1<sup>®</sup> and other microcontrollers use ratiometric A/D conversion.

### Integrated Pulse Snubber

The heavy duty pressure transmitter with an integrated pulse snubber is specially suited for hydraulic applications where cavitation, liquid hammer, or pressure peaks may occur. The pressure peaks are often short but in extreme excess of the measuring range of the transmitter.

The integrated pulse snubber is principally a nozzle in the passage between the measured medium and the pressure sensitive element of the transmitter



### Features


- 3 pin AMP<sup>®</sup> Econoseal J-series
- DIN pressure connection
- PLUS+1<sup>®</sup> Compliant
- Resistant to cavitation, liquid hammer, and pressure peaks
- Overload pressure 10 to 20 times measuring range
- Durability: >10 million cycles
- For use in severe industrial environments:
  - High vibration stability
  - IP 67 environmental sealing
  - Wetted parts and enclosure of acid resistant steel
- CE marked: EMC protected in accordance with EU EMC directive
- Temperature compensated, linearized, and laser calibrated
- Ratiometric output signal: 10 to 90% of supply voltage

[Comprehensive technical literature online at powersolutions.danfoss.com](http://powersolutions.danfoss.com)


Data Sheet  
**MBS2250 DIN Pressure Transmitter**

**Dimensions**

mm [in]

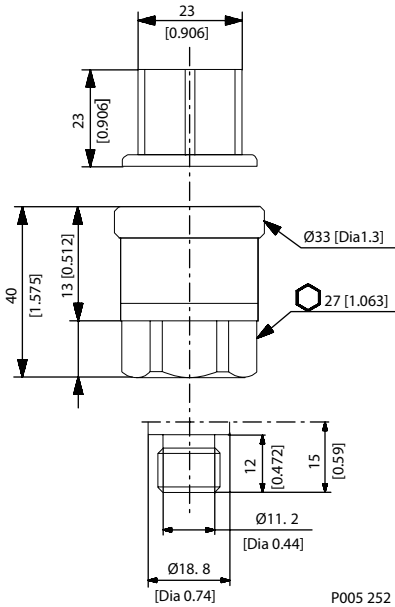

AMP<sup>®</sup> Econoseal J Series (Male)



Pinout and Wiring Information

Pin	Function
1	+ supply
2	÷ supply
3	Output

Electrical Characteristics

<b>Nominal output signal</b>	10 to 90% of V supply
<b>Supply voltage V supply (polarity protected)</b>	4.75 to 8 Vdc 5 Vdc (nominal)
<b>Power consumption</b>	< 5 mA at 5 Vdc
<b>Output impedance</b>	< 25 $\Omega$
<b>Load resistance</b>	$R_L > 5 \text{ k}\Omega$ at 5 Vdc

**Specifications**

Pressure Connection

Thread Version	
DIN	DIN 3852 - G 1/4 A, NBR O-ring 13.3 x 1.8, 630 bar [9140 psi]

Mechanical Characteristics

<b>Materials</b>	Wetted parts: DIN 17440 - 1.4404 Enclosure: (AISI 316 l)
<b>Weight</b>	0.2 kg [0.44 lb]

Performance (IEC 770)

<b>Accuracy (at reference conditions)</b>	$\pm 0.3\%$ of full-scale (typical); $\pm 1\%$ of full-scale (maximum)
<b>Non-linearity (best fit straight line)</b>	$< \pm 0.2\%$ of full-scale
<b>Hysteresis and repeatability</b>	$\leq \pm 0.1\%$ of full-scale
<b>Thermal zero point shift</b>	$\leq \pm 0.1\%$ of full-scale/10k (typical); $\leq \pm 0.2\%$ of full-scale/10k (maximum)
<b>Thermal sensitivity (span) shift</b>	$\leq \pm 0.1\%$ of full-scale/10k (typical); $\leq \pm 0.2\%$ of full-scale/10k (maximum)
<b>Response time (liquids) 10 to 20% of full scale - depending on measuring range</b>	< 4 ms
<b>Overload static and burst pressure</b>	Maximum overload: 1500 bar; Maximum burst: 2000 bar
<b>Durability, P: 10 to 90% of full-scale</b>	> 10 million cycles

Product Part Numbers

Measuring range	Danfoss part number
0 to 2.5 bar [36 psi]	162U9901
0 to 40 bar [580 psi]	162U9902
0 to 160 bar [2320 psi]	162U9903
0 to 250 bar [3626 psi]	162U9904
0 to 400 bar [5800 psi]	162U9905
0 to 500 bar [7250 psi]	162U9906
0 to 600 bar [8700 psi]	162U9907

*Environmental Parameters*

<b>Temperature range</b>	Operating	-40 to 85° C (-40 to 185° F)	
	Compensated	0 to 80° C (32 to 176° F)	
	Storage	-50 to 85° C (-58 to 185° F)	
<b>EMC Emission</b>		EN 50081-1	
<b>EMC Immunity</b>	Electrostatic discharge	Air mode: 8 kV Contact mode: 4 kV	EN 50082-2 (IEC 801-2)
	RF (field)	100 V/m 26 MHz to 1 GHz	EN 50082-2 (IEC 801-3)
	RF (conducted)	10 V rms 150 kHz to 30 MHz	EN 50082-2 (IEC 801-6)
	Transient (burst)	4 kV (CM), clamp	EN 50082-2 (IEC 801-4)
	Transient (surge)	1 kV (CM, DM) Rg = 42Ω	EN 50082-2 (IEC 801-5)
<b>Insulation resistance</b>		>100 MΩ at 500 Vdc	
<b>Vibration stability</b>	Sinusoidal	20 G; 25 Hz to 2 kHz	IEC 68-2-6
	Random	7.5 G rms; 5 Hz to 1 kHz	IEC 68-2-34; IEC 68-2-36
<b>Shock resistance</b>	Shock	500 G / 1 m	IEC 68-2-27
	Free fall		IEC 68-2-32
<b>Mains frequency test</b>		500 V, 50 Hz	SEN 361503
<b>Enclosure</b>		AMP 173065-2	IP 67 - IEC 529

ENGINEERING  
TOMORROW



---

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed.  
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

---