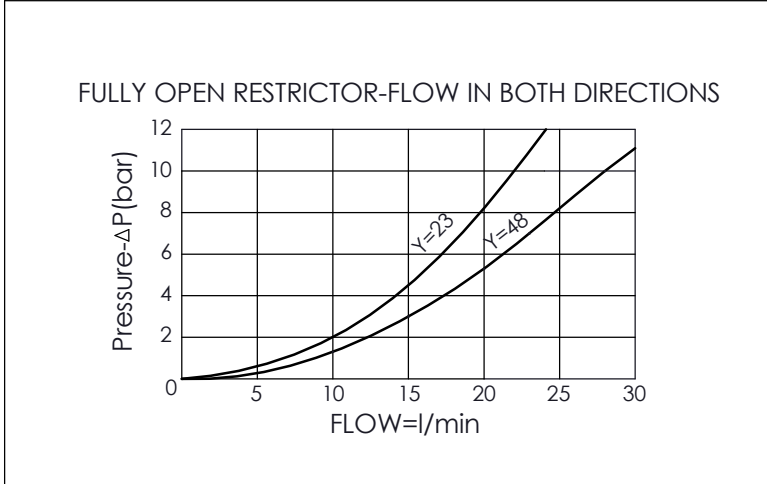






TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	25 l/min (Refer To Performance Chart)
Cavity-Tooling:	13A-2
Installation torque:	40 - 50 Nm
Weight:	0.15 (Z=L) kg 0.14 (Z=LP)

X	OPERATION
20	Fully Adjustable Needle with Sharp-Edge Orifice



Y	MAXIMUM NOMINAL ORIFICE DIAMETER
48	Ø 4.8 mm
23	Ø 2.3 mm
15	Ø 1.5 mm

Z	OPTIONS
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
KF	Handknob with Panel Mount. 
T	Three-winged Handknob Kit. 