


TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	80 l/min (Refer To Performance Chart)
Cavity-Tooling:	13A-2
Installation torque:	40-50 Nm
Weight:	0.15 (Z=L) kg 0.14 (Z=LP)

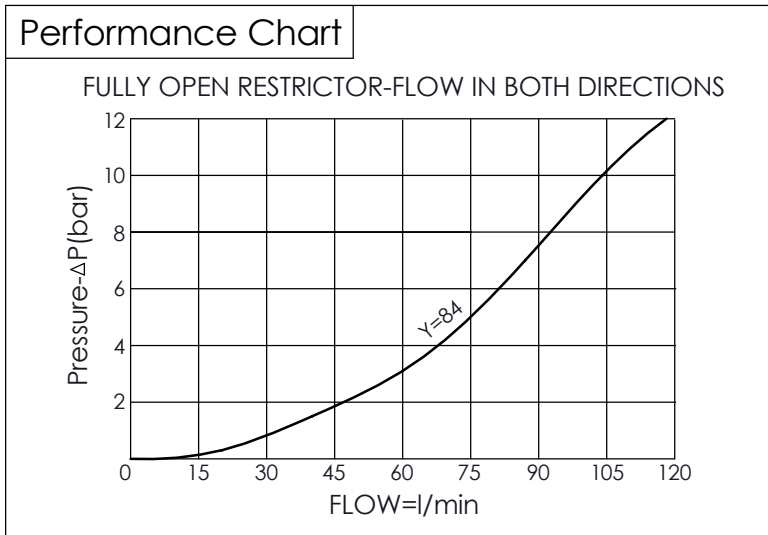

X	OPERATION
<b>28</b>	Fully Adjustable Needle Valve

Y	MAXIMUM NOMINAL ORIFICE DIAMETER
<b>84</b>	Ø 8.4 mm

Z	OPTIONS
<b>L</b>	Leakproof hex. socket screw.
<b>LP</b>	Leakproof hex. socket screw. With stainless steel external metal components
<b>K</b>	Handknob with Lock Knob. (Order Code: 6ZAK001)
<b>I</b>	Three-winged Handknob Kit.