


TECHNICAL DATA


Max. Setting:	420	bar
Rated flow:	200	l/min
Cavity-Tooling:	3A-2	
Installation torque:	60-70	Nm
Weight:	0.30	kg

Will accept maximum pressure at port 2;
suitable for use in cross port relief circuits.

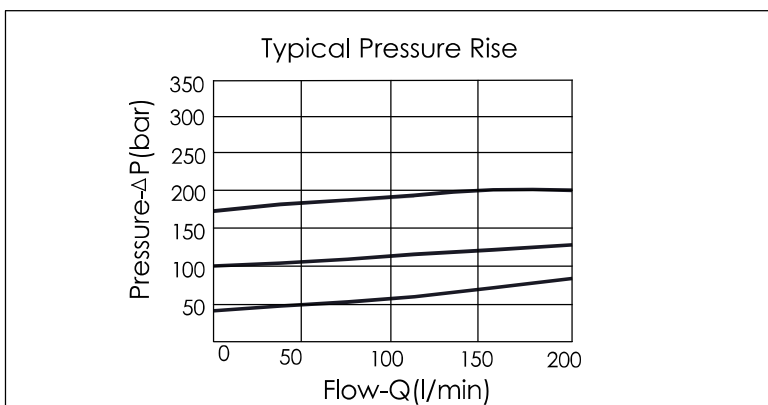

X	OPERATION
25	Direct Acting 1 to 2 (P to T)
Response Time-Typical (2 ms) Maximum Leakage (0.7 cc/min.) Dirt tolerant	

Y	PRESSURE SETTING
A	35-210 bar (70 bar Standard Setting)
B	20-105 bar (70 bar Standard Setting)
C	70-420 bar (70 bar Standard Setting)
D	14-55 bar (28 bar Standard Setting)
E	10-28 bar (14 bar Standard Setting)
S	3.5-14 bar (7 bar Standard Setting)
W	55-315 bar (70 bar Standard Setting)

Z	OPTION
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components (Buna-N Seal) 