



STANDARD MANIFOLD LINE MOUNT BODIES

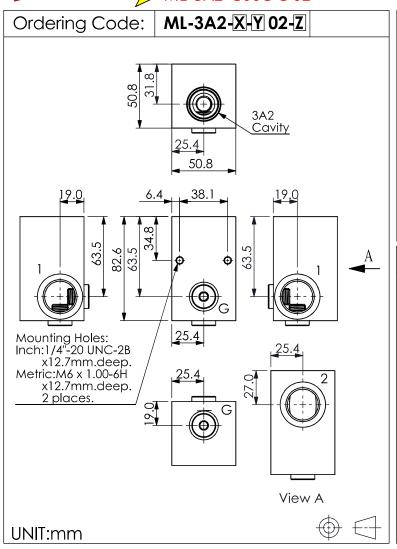

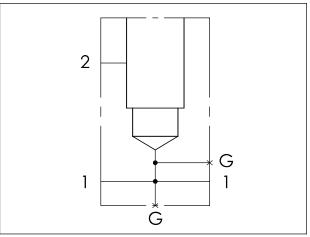

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Ductile Iron

Body Pressure Rating: 350 bar

Cavity:

Refer to 3A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.42 kg(WITHOUT VALVES)
Ductile Iron	1.32 kg(WITHOUT VALVES)

^{*} If you need the special specification. Please contact us.

	PORT SIZE		
X	PORTS	PORT	
	1,2	G	
G06G	G 3/4"	G 1/4"	
S08G	SAE 8	1/4"NPT	
\$10G	SAE 10	1/4"NPT	
\$12G	SAE 12	1/4"NPT	

Y	BODY MATERIAL	Z	CART
Α	HIGH-STRENGTH ALUMINUM		WITHO
S	DUCTILE IRON	RPOA	RP3A20A
		RD5A	RD3A25A
		Cartridge and mani	tion is only Program a flods asser

Z	CARTRIDGE VALVES SELECTION		
	WITHOUT VALVE		
RPOA	RP3A20AL(200 LPM,7~210 bar)		
RD5A	RD3A25AL(200 LPM,35~210 bar)		

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and maniflods assembly in accordance with request function (flow \ pressure \ \ ... etc.)

Rev.150522 M.03A.301