



## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS1103W

 Parker Part No:
 938339Q

 OEM:
 MP Filtri

 OEM Part No:
 HP0653A10VN&AN

Product Dimensions			
A (mm)	45.0	(inch)	1.77
B (mm)	25.5	(inch)	1.00
D (mm)	45	(inch)	1.77
E (mm)	209.0	(inch)	8.23

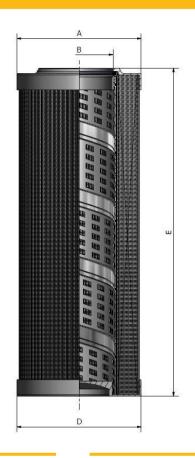



Construction Materials		
Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Mild steel tin plated	
Bottom Endcap:	Mild steel tin plated	
Inner Support Cylinder:	Mild steel tin plated	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

## **Calculated Performance Criteria**

 Differential Pressure ( $\Delta p$ ):
 0.46 bar @ 150 l/min

 Tested to ISO3968 @ 32 cSt
 6.67 psi @ 33.00 gpm

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar Tested to ISO2941 >290 psi

## **Dirt Holding Capacity acc. to ISO16889**

>13.8 gram @ 7 bar terminal pressure drop >13.8 gram @ 102 psi terminal pressure drop

