


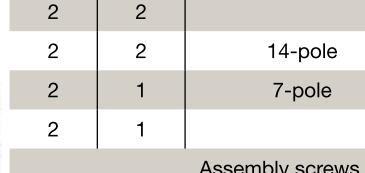
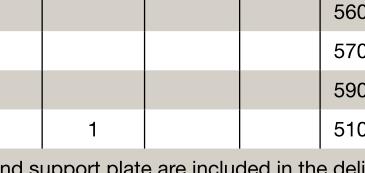



Coupling Plate with Protective Cap (3/4" + 1/2")**C-Line Standard**

				Coupling 3/4"	Coupling 1/2"	Electrical Connection (1 pc.)	Blank Plug 1/2"	Locking Lever Pos.	Locking Button	Weight gr.	Part Number
	2	2							6600	TMFC 7755	
								Twin-arm	left	6900	TMFC 7755 Q
								Twin-arm	left	7800	TMFC 775Y
								Twin-arm	left	6400	TMFC 775W
								Twin-arm	right	6600	TMFC 7755 R
								Twin-arm	right	6900	TMFC 7755 QR
	2	1							7800	TMFC 775Y R	
								Twin-arm	right	6400	TMFC 775W R
								Twin-arm	right	6300	TMFC 7755 A
								Twin-arm	left	6600	TMFC 7755 QA
								Twin-arm	left	7500	TMFC 775Y A
								Twin-arm	left	6100	TMFC 775W A
	2	2							6300	TMFC 7755 AAR	
								Twin-arm	left	6600	TMFC 7755 QAAR
								Twin-arm	right	7500	TMFC 775Y AAR
								Twin-arm	right	6100	TMFC 775W AAR
								Twin-arm	right	6400	TMFC 7755 B
								Twin-arm	left	6900	TMFC 7755 QB
	2	1							7600	TMFC 775Y B	
								Twin-arm	left	6200	TMFC 775W B
								Twin-arm	right	6400	TMFC 7755 BBR
								Twin-arm	right	6900	TMFC 7755 QBBR
								Twin-arm	right	7600	TMFC 775Y BBR
								Twin-arm	right	6200	TMFC 775W BBR
	2	1							6100	TMFC 775W AAR	
								Twin-arm	right	6100	TMFC 775W AAR
								Twin-arm	right	6400	TMFC 7755 B
								Twin-arm	left	6900	TMFC 7755 QB
								Twin-arm	left	7500	TMFC 775Y B
								Twin-arm	right	6200	TMFC 775W B
Protective cap and assembly screws are included in the delivery.											

Plug Plate with Support Plate (3/4" + 1/2")**C-Line Standard**

				Plug 3/4"	Plug 1/2"	Electrical Connection (1 pc.)	Blank Plug 1/2"	Locking Lever Pos.	Locking Button	Weight gr.	Part Number
	2	2								5600	TMMC 7755
	2	2	14-pole							5700	TMMC 7755 Q
	2	1	7-pole							5900	TMMC 775Y
	2	1								5100	TMMC 775W
Assembly screws and support plate are included in the delivery.											