


2

Spulenbezeichnung:

AK-D1 V W C J J 1 P 91

Other spool types on request.

Dimensions with "Deutsch" DT04-2P Connector (only C and D -style shown)

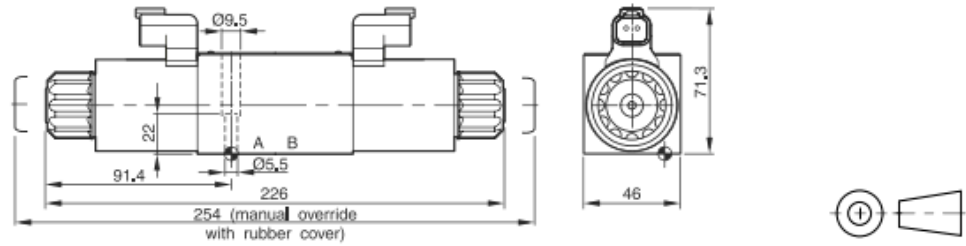

Surface finish	Kit	Kit	Kit	Kit
	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

D1MW UK.Indd RH 06.11.2014



2-37

Parker Hannifin Corporation
Hydraulics Group

Auszug aus:

access02_UK.INDD CM_22.01.2008.1

STRENGTH availability



2-98

Parker Hannifin GmbH & Co. KG
Hydraulic Controls Division
Kaarst, Germany

Coil kits: AK-D1VW-C-...	(Example: AK-D1VW-C-J)	
Voltage Volt/Hertz	Voltage Code	
12V=	K	
24V=	J	
98V=	U	
205V=	G	
110V/50Hz / 120V/60Hz	Y	
230V/50Hz / 240V/60Hz	T	