


DATA SHEET - OPERATION MANUAL

APPLICATION

Directional spool valves type WE6... electrically operated are intended for change in direction of fluid flow in a hydraulic system and thus it allows to change direction of movement of a receiver - mostly piston rod of a cylinder or hydraulic motor as well to use functions: *on* and *off*. These directional spool valves are used for subplate mounting in any position in a hydraulic system.


Directional spool valve is complied with the regulations of directive 2006/95/WE for the following voltages:

- 50 – 250 V for AC
- 75 – 250 V for DC

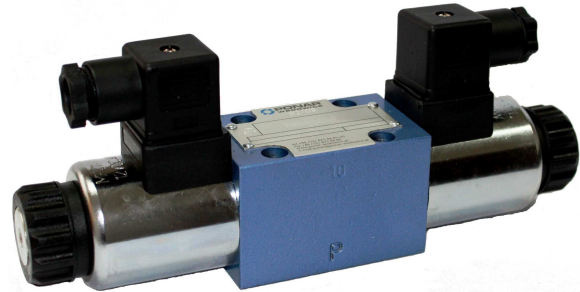

DESCRIPTION OF OPERATION

4WE6 E -32/G24NZ4

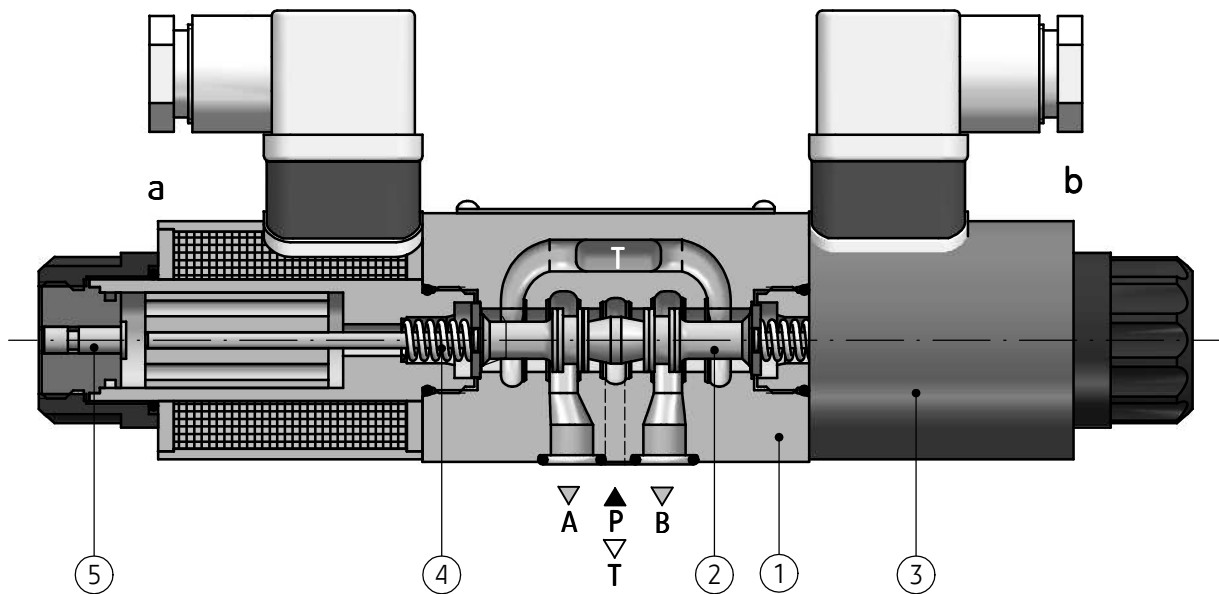


Main elements of directional spool valve type WE6... are: housing (1), solenoids (3), control spool (2), centering springs (4) and manual overrides (5). The spool (2) is shifted when it is moved into one of end positions by the force of solenoid (3) affecting it. The return of the spool into neutral position and centering are secured by the centering springs (4). The shape of the spool (control edge spacing) affects the configuration of connections among the ports: **A**, **B**, **P** and **T**. Function of ports:

- P** - supply port
- T** - oil return to the tank

A, **B** - ports for a receiver

In case of emergency, the spool can be shifted manually by means of the override (5) - only for version with manual override.


When the situation is anticipated, directional spool valve must be mounted in the way as to be available.




6

Version WE6.../OF... - only for spools: **A**, **C**, **D**. 2-position directional spool valve without return springs with detent. The spool (2) is positioned and supported with detent (6), and its shift results from supplying voltage to one solenoid (3).

DESCRIPTION OF OPERATION



Version WE6.../O...- only for spools: **A, C, D**. 2-position directional spool valve without return springs. The spool is positioned and supported with attached solenoid. There is no neutral position as the spool is not positioned.



Version WE6.../...**B**... - directional spool valve designation like that, has throttle insert in port **P**.

TECHNICAL DATA


Hydraulic fluid	mineral oil						
Required fluid cleanliness class	ISO 4406 class 20/18/15						
Nominal fluid viscosity	37 mm ² /s at temperature 55 °C						
Viscosity range	2,8 up to 380 mm ² /s						
Fluid temperature range (in a tank)	recommended	40°C up to 55°C					
	max	-20°C up to +70°C					
Ambient temperature range	- 20°C up to +50°C						
Maximum operating pressure	ports P, A, B		35 MPa				
	port T		21 MPa				
Flow section for spool W in central position (schemes on page 4)	3 % nominal flow						
Weight	with 1 solenoid	WE6...- 1,5 kg			WE6...H...- 2,8 kg		
	with 2 solenoids	WE6...- 2,1 kg			WE6...H...- 3,4 kg		
Supply voltage of solenoids	DC			AC (plug-in connector with rectifier)			AC direct supply
	12V	24V	110V	230V-50Hz	220V- 50Hz	110V- 50Hz	230V- 50Hz
Supply voltage tolerance	±10%						±10%
Power requirement (DC)	30 W						-
Holding power (AC)	-						50 VA
Switch-on power (AC)	-						300 VA
Switching time	ON up to 60 ms						ON up to 40 ms
	OFF up to 40 ms						OFF up to 25 ms
Maximum switching frequency	15000 on/h						12000 on/h
Degree of protection	IP 65						
Solenoid coil temperature	max 150 °C						

INSTALLATION AND OPERATION REQUIREMENTS

1. Only fully functional and operational valve, properly connected to electrical installation must be used. Connecting or disconnecting the valve to an electrical installation must only be carried out by qualified personnel.
2. Ground connection (\perp) must be connected with protective earth wire (PE \perp) in supply system according to appropriate instructions.
3. Solenoid plug shall precisely adhere to socket and shall be secured with thread bolt screwed in securely in a place. It is forbidden to operate the valve if the tightness and suitable clamp of cable in the plug gland are not ensured.
4. For the ...W230 - 50... valves, simultaneous joining of two solenoids of the same valve should not be permitted (partial overriding of the valve can overheat and damage the winding coils).
5. During the period of operation must be kept fluid viscosity acc. to requirements defined in this Data Sheet - Operation Manual
6. In order to ensure failure free and safe operation the following must be checked:
 - condition of the electrical connection
 - proper working of the valve
 - cleanliness of the hydraulic fluid
7. Due to heating of electromagnet solenoid coils to high temp., the valve shall be placed in such way to eliminate the risk of accidental contact with solenoid during operation or to apply suitable covers acc. to PN-EN ISO 13732-1 and PN-EN 982
8. In order to ensure tightness of the directional valve block, one should take care of dimension of sealing rings and valve operation parameters given in this Data Sheet - Operation Manual
9. A person that operates the valve must be thoroughly familiar with this Data Sheet - Operation Manual.


DIAGRAMS

Diagrams for 3-position directional spool valves

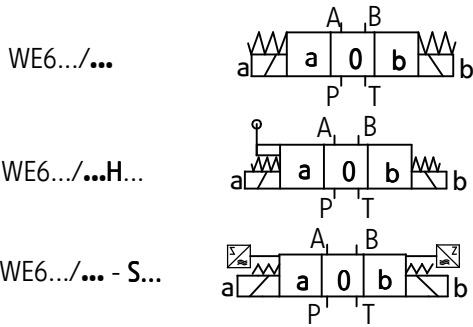


Diagrams for 2-position directional spool valves

versions with positions a, 0

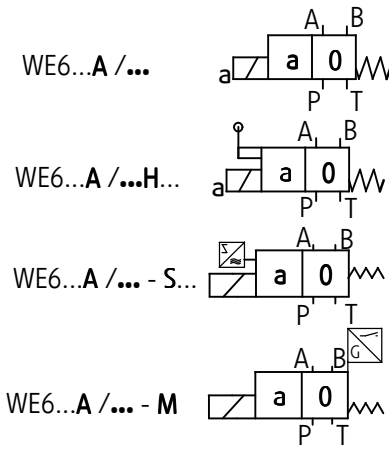


versions with positions 0, b

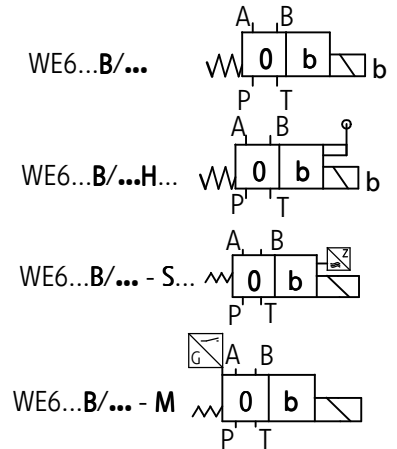


Diagrams for spools


working and indirect positions

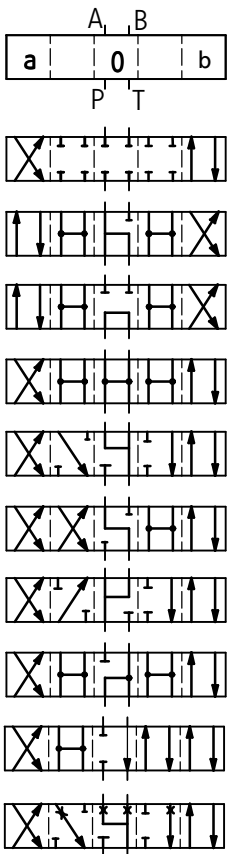


working positions

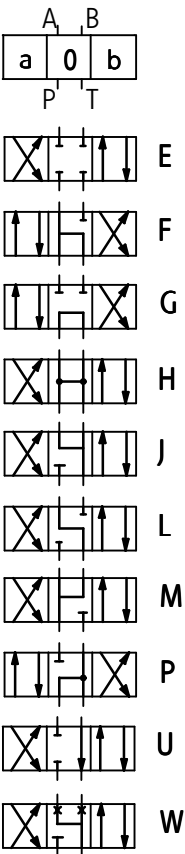

working and indirect positions

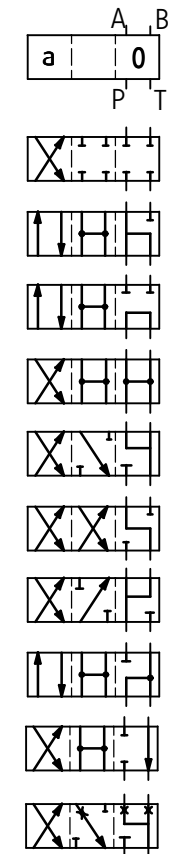


working positions

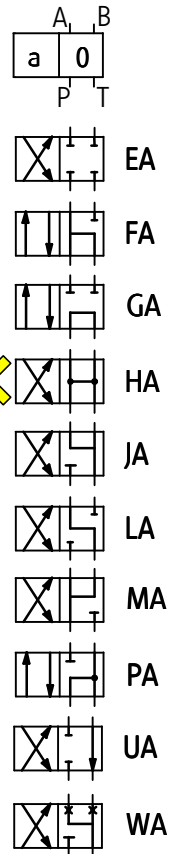

working and indirect positions



working positions

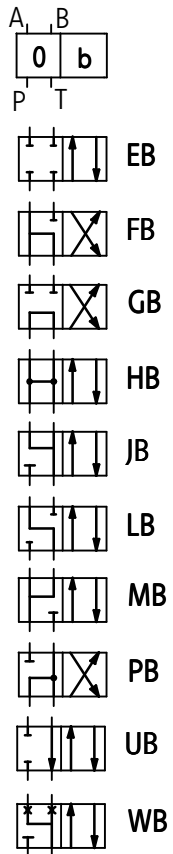


NOTE:

Flow section in central position for spool **W** according to page 2

DIAGRAMS

Diagrams for 2-position directional spool valves

versions with positions a, b

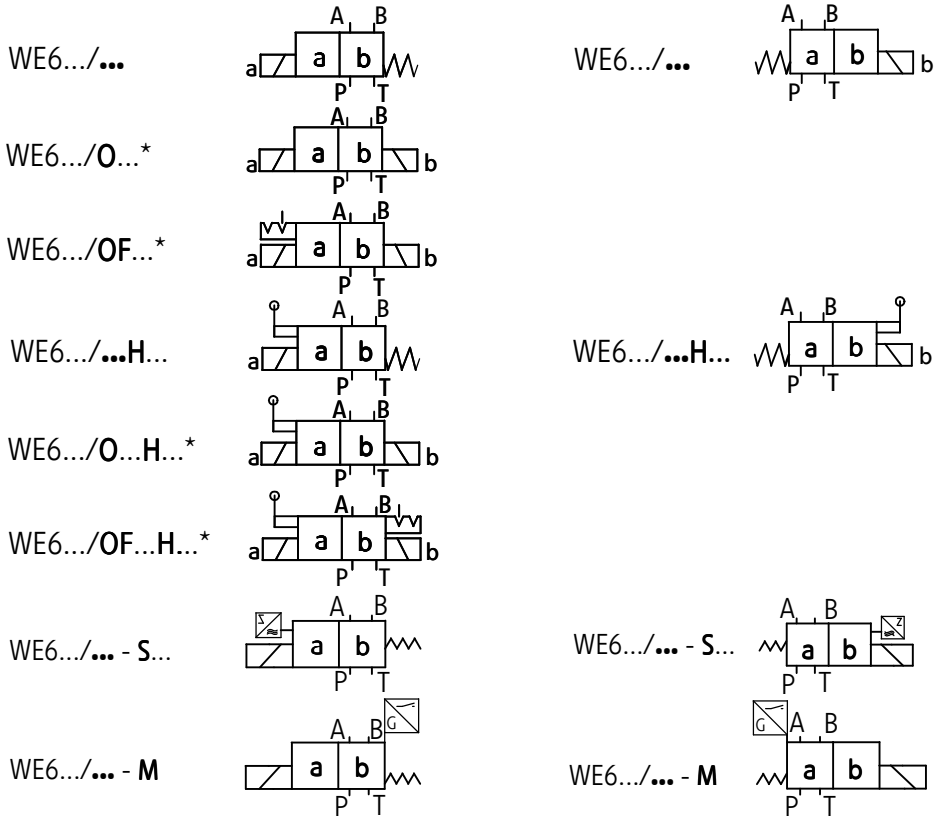

NOTE:

(*) - versions: WE6.../O...;.../OF...; .../O...H...; .../OF...H...
only with spools - diagram A, C, D

















Diagrams for spools

working and indirect positions

working positions


working and indirect positions

working positions



OVERALL AND CONNECTION DIMENSIONS


version WE6.../...Z4... (electrical connection type ISO 4400)

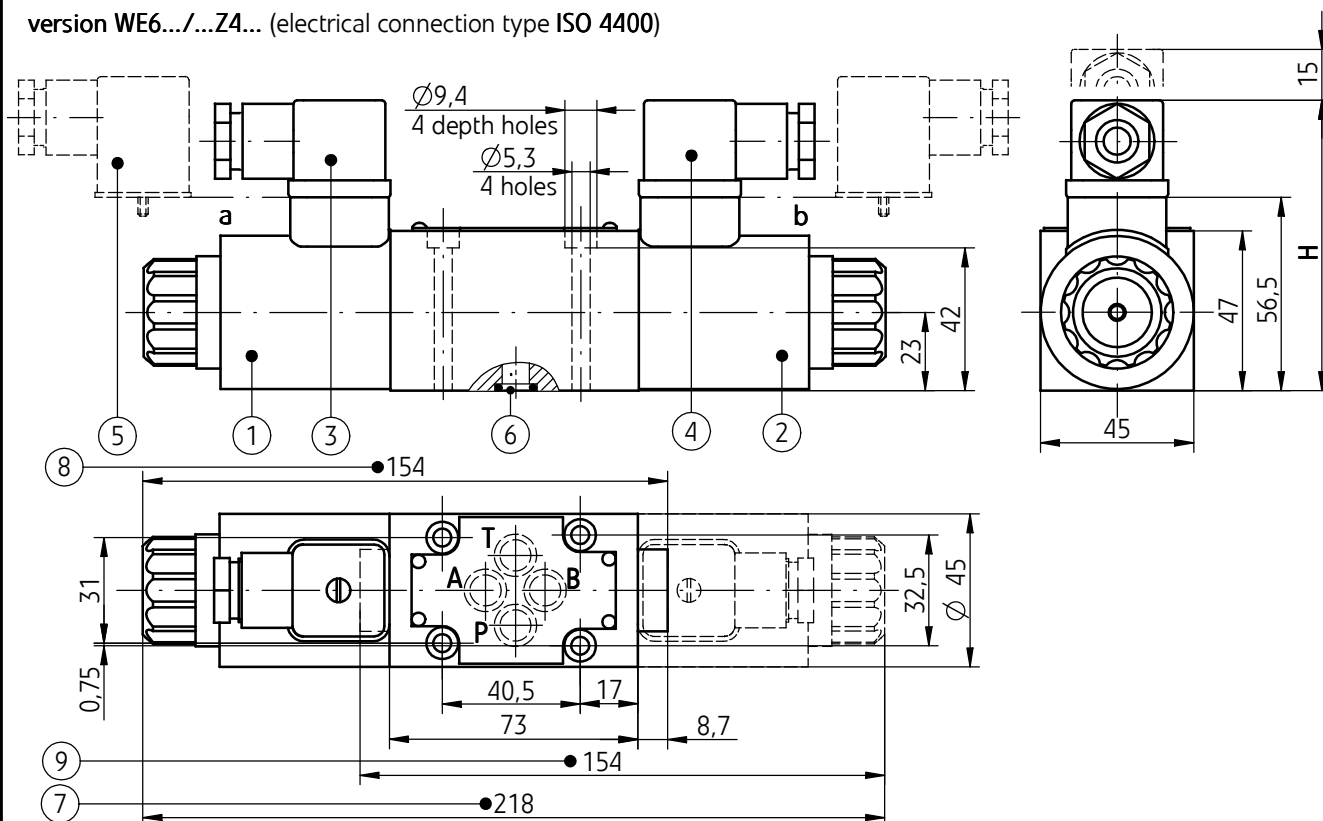

Option of connection Z4...	Control voltage	Dimension H
plug-in-connector ISO 4400 (DIN 43650 - A)	12V DC, 24V DC, 110V DC	86
plug-in-connector ISO 4400 (DIN 43650 - A) with rectifier	110V AC, 220V AC, 230V AC	93

NOTES:


- versions WE6... with DC solenoids with other electrical connectors, see page 7
- versions with AC solenoids with direct supply, see page 8

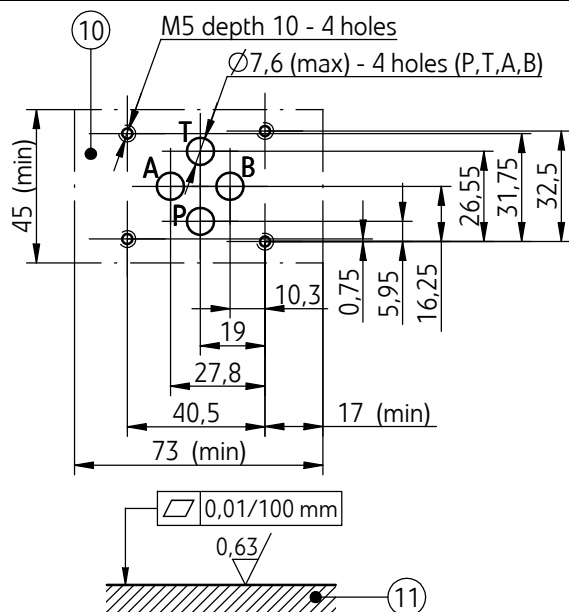

- Solenoid on side a
- Solenoid on side b
- Plug-in-connector on side a - ISO 4400 type (DIN 43650 - A)
- Plug-in-connector on side b - ISO 4400 type (DIN 43650 - A)
- Plug-in-connector - ISO 4400 type (DIN 43650 - A) with rectifier
- O-ring 9,2 x 1,8 - 4 pcs/set
- Directional spool valve dimension with 2 solenoids on side a, b:
 - 3-position directional spool valve springs centered (spool diagrams: E, F, G, H, J, L, M, P, U, W - according to page 4)
 - 2-position directional spool valve without return springs
 - 2-position directional spool valve without springs and with detent (spool diagrams: A, C, D, D1 - according to page 5)
- Directional spool valve dimension with 1 solenoid - on side a
 - 2-position springs centered (spool diagrams: A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA - according to pages 4, 5)
- Directional spool valve dimension with 1 solenoid - on side b
 - 2-position springs centered (spool diagrams: B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB - according to pages 4, 5)
- Porting pattern for directional spool valve - configuration of connection holes in accordance with the standard ISO 4401 - identified by ISO 4401-03-02-0-94 (nominal size CETOP 03) fixing screws M5 x 50 - 10.9 in accordance with PN - EN ISO 4762 - 4 pcs/set; tightening torque Md = 9 Nm
- Subplate surface required

OVERALL AND CONNECTION DIMENSIONS

versions: WE6.../...G12...J...; ...G24...J... (electrical connection type AMP Junior Timer)

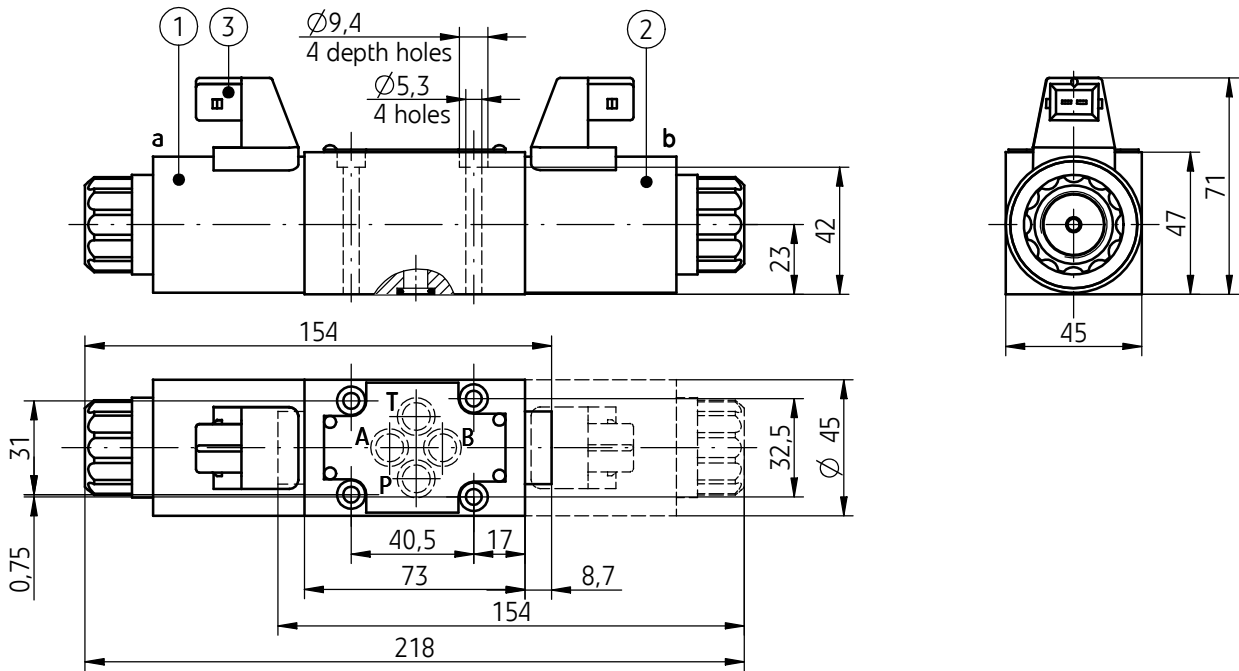


NOTES:

Description of other elements of the valve drawing; porting pattern and requirements of surface state of the subplate - as in version WE6.../...Z4..., see page 6

- 1 - Solenoid on side **a**
- 2 - Solenoid on side **b**
- 3 - Connector type **AMP Junior Timer male 2-pole** (plug-in-connectors not shown in the drawing must be ordered separately - Data Sheet **WK 499 963**)

version WE6.../...G24...D... (electrical connection type Deutsch)

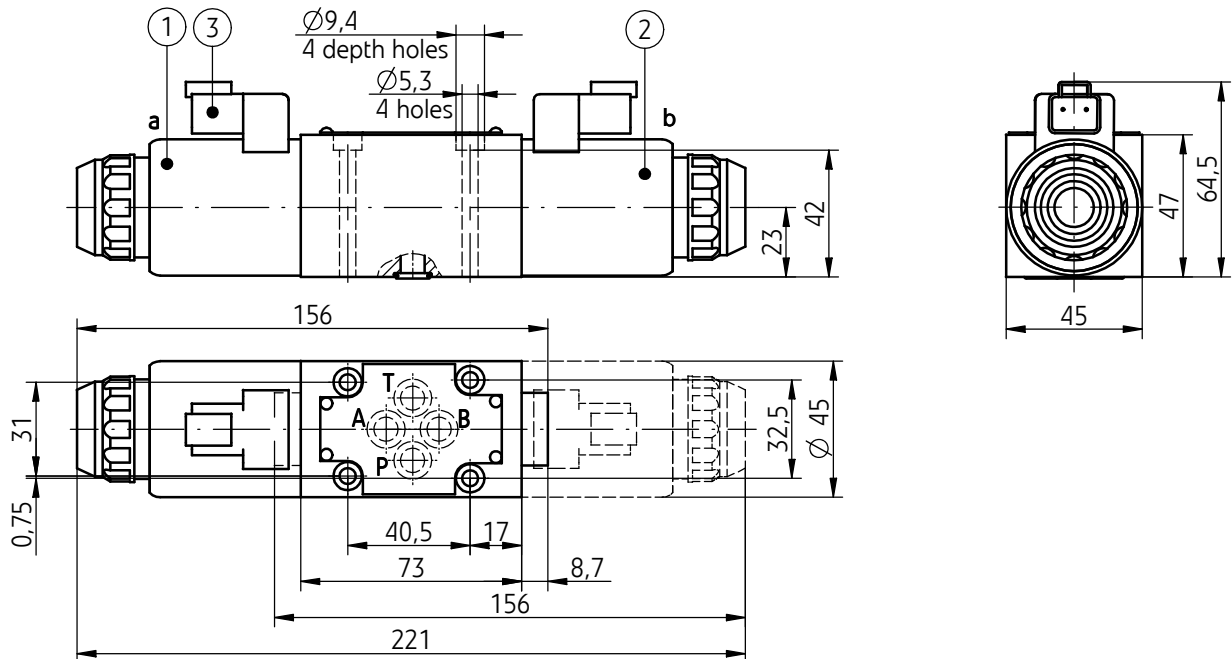


NOTES:

Description of other elements of the valve drawing; porting pattern and requirements of surface state of the subplate - as in version WE6.../...Z4..., see page 6

- 1 - Solenoid on side **a**
- 2 - Solenoid on side **b**
- 3 - **Deutsch DT04 - 2P** type connector (plug-in connectors **Deutsch DT06 - 2S** type not shown in the drawing must be ordered separately - Data Sheet **WK 499 963**)

OVERALL AND CONNECTION DIMENSIONS

version WE6.../...W230-50...Z4... (AC solenoids; electrical connection type ISO 4400)

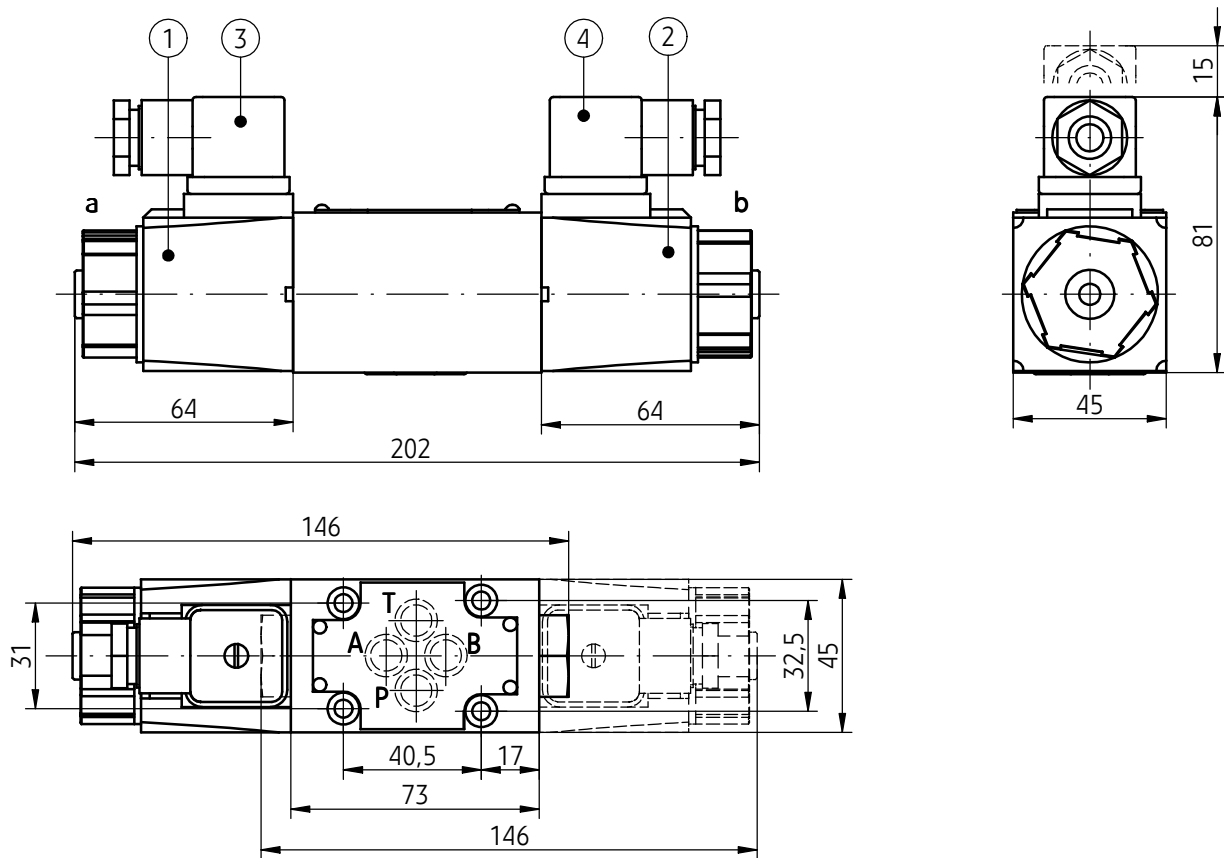

NOTES:

- other dimensions, description of other elements of the valve drawing; porting pattern and requirements of the surface state of the subplate - as in version WE6.../...Z4... with DC solenoids, see page 6
- details of the WE6.../...W230 - 50...H Z4... version (with a manual control lever) - as in version WE6.../...H Z4... with DC solenoids, see page 9 - 11

- 1 - AC solenoid (with direct supply) from the **a** side
- 2 - AC solenoid (with direct supply) from the **b** side

NOTE:

simultaneous joining of two solenoids of the same valve should not be permitted (partial overriding of the valve can overheat and damage the winding coils)


- 3 - Plug-in-connector on side **a** - type ISO 4400 (DIN 43650 - A)
- 4 - Plug-in-connector on side **b** - type ISO 4400 (DIN 43650 - A)

OVERALL AND CONNECTION DIMENSIONS

3-position versions WE6.../...H Z4...; .../...HS Z4...

2-position versions WE6.../O...H Z4...; .../OF... H Z4...

WE 6.../O...HS Z4...; .../OF...HS Z4...

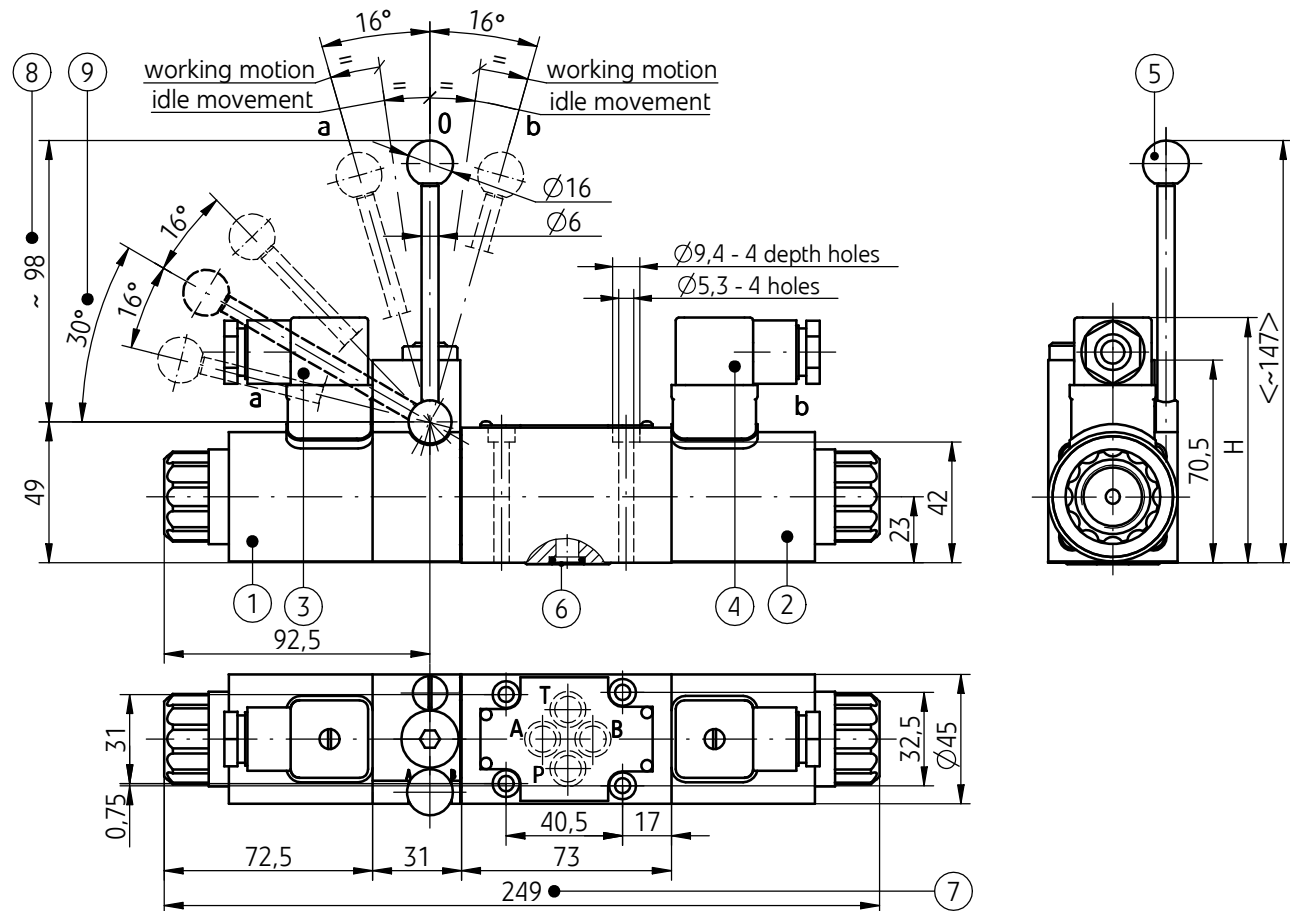

Option of connection Z4...	Control voltage	Dimension H
plug-in-connector ISO 4400 (DIN 43650 - A)	12V DC, 24V DC, 110V DC	86
plug-in-connector ISO 4400 (DIN 43650 - A) with rectifier	110V AC, 220V AC, 230V AC	93

NOTES:

- versions WE6.../...H... with other electrical connections, see page 11
- porting pattern and requirements of surface state of the subplate - as in version WE6.../...Z4..., see page 6


- Solenoid on side **a**
- Solenoid on side **b**
- Plug-in-connector on side **a** - type ISO 4400 (DIN 43650 - A)
- Plug-in-connector on side **b** - type ISO 4400 (DIN 43650 - A)
- Manual control lever
- O-ring 9,2 x 1,8 - 4 pcs/set
- Directional spool valve dimension with 2 solenoids on side **a, b**:
 - 3-position directional spool valve springs centered versions WE6.../...H...; ...HS... (spool diagrams: **E, F, G, H, J, L, M, P, U, W** - according to page 4)
 - 2-position directional spool valve without return springs versions WE6.../O...H...; .../O...HS...
 - 2-position directional spool valve without springs and with detent versions WE6.../OF...H...; .../OF...HS... (spool diagrams: **A, C, D** - according to page 5)
- Manual control lever positions in versions: WE6.../...H... WE6.../O...H...; .../OF...H...
- Manual control lever positions in versions: WE6.../...HS... WE6.../O...HS...; .../OF...HS...

NOTES:

The valve is switched by the manual control lever - item 5, return of the lever to the initial (neutral) state occurs automatically. After switching the valve by using the solenoid, the lever - item 5 remains inactive.

OVERALL AND CONNECTION DIMENSIONS

2-position versions WE6.../...H Z4...; ...HS Z4...

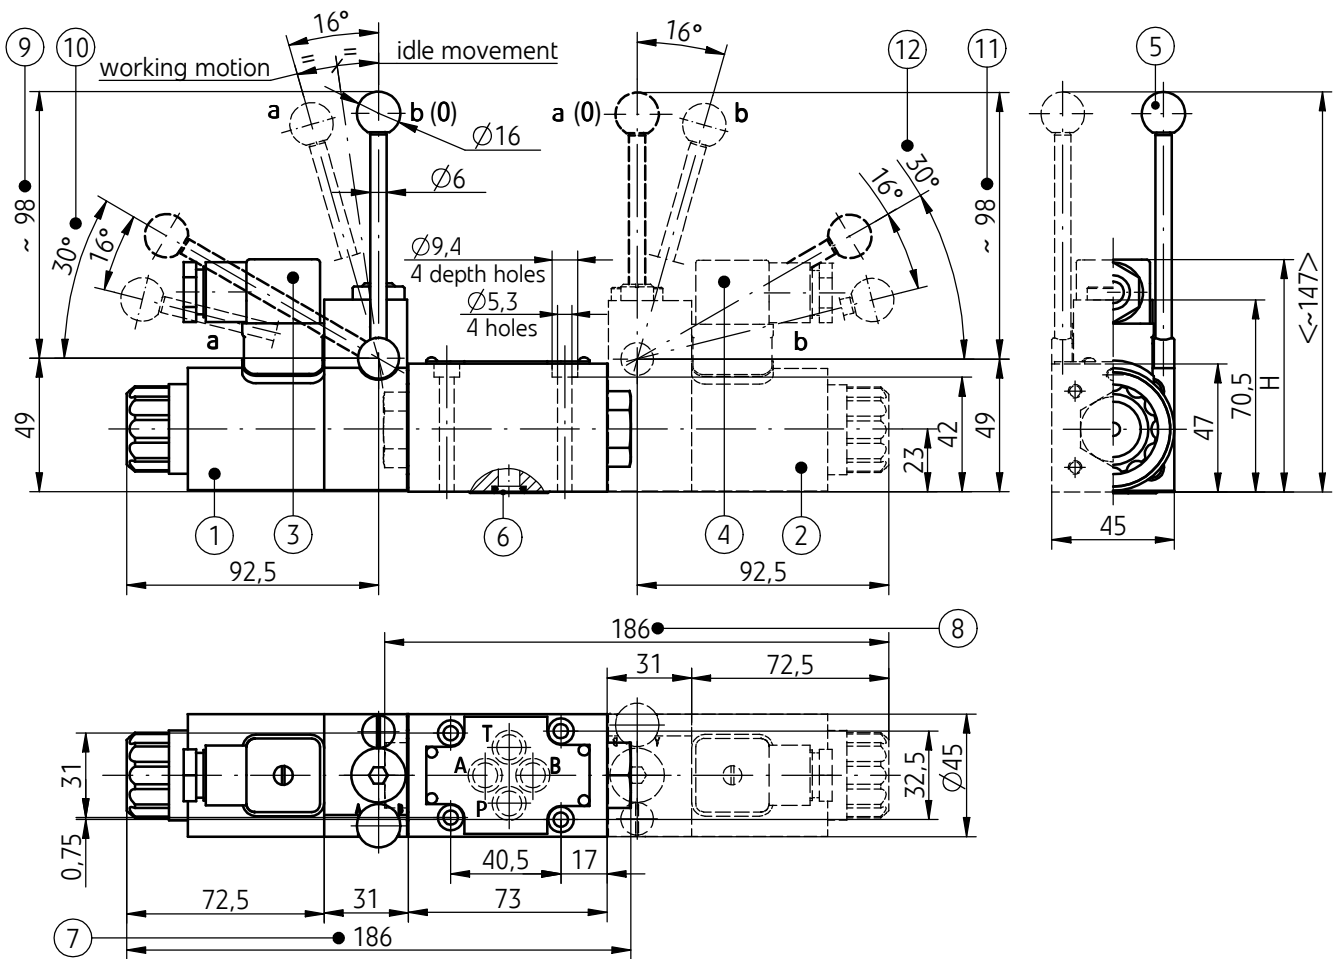

Option of connection Z4...	Control voltage	Dimension H
plug-in-connector ISO 4400 (DIN 43650 - A)	12V DC, 24V DC, 110V DC	86
plug-in-connector ISO 4400 (DIN 43650 - A) with rectifier	110V AC, 220V AC, 230V AC	93

NOTES:

- versions WE6.../...H... with other electrical connections, see page 11
- porting pattern and requirements of surface state of the subplate - as in version WE6.../...Z4..., see page 6


- Solenoid on side a
- Solenoid on side b
- Plug-in-connector on side a - type ISO 4400 (DIN 43650 - A)
- Plug-in-connector on side b - type ISO 4400 (DIN 43650 - A)
- Manual control lever
- O-ring 9,2 x 1,8 - 4 pcs/set
- Directional spool valve dimension with 1 solenoid - on side a, 2-position with return spring (spool diagrams: A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA - according to pages 4, 5)
- Directional spool valve dimension with 1 solenoid - on side b, 2-position with return spring (spool diagrams: B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB - according to pages 4, 5)
- Manual control lever positions in versions: WE6.../...H... with 1 solenoid - on side a
- Manual control lever positions in versions: WE6.../...HS... with 1 solenoid - on side a
- Manual control lever positions in versions: WE6.../...H... with 1 solenoid - on side b
- Manual control lever positions in versions: WE6.../...HS... with 1 solenoid - on side b

NOTES:

The valve is switched by the manual control lever - item 5, return of the lever to the initial (neutral) state occurs automatically. After switching the valve by using the solenoid, the lever - item 5 remains inactive.

OVERALL AND CONNECTION DIMENSIONS

versions: WE6.../...H...G12...J...; ... H... G24...J... (electrical connection type **AMP Junior Timer**)

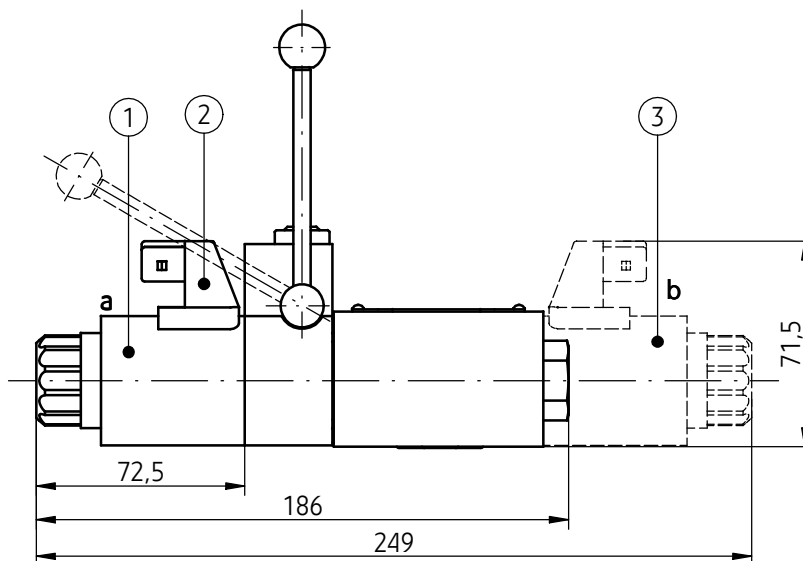

NOTE:

Other dimensions, description of elements of the valve drawing, porting pattern and requirements of surface state of the subplate - as in version WE6.../...H...Z4..., see page 7


1 - Solenoid on side **a**

2 - Solenoid on side **b**

3 - **2-poles male AMP Junior Timer** type connector

(plug-in connectors not shown in the drawing must be ordered separately - Data Sheet **WK 499 963**)

version WE6.../...H...G24...D... (electrical connection type **Deutsch**)

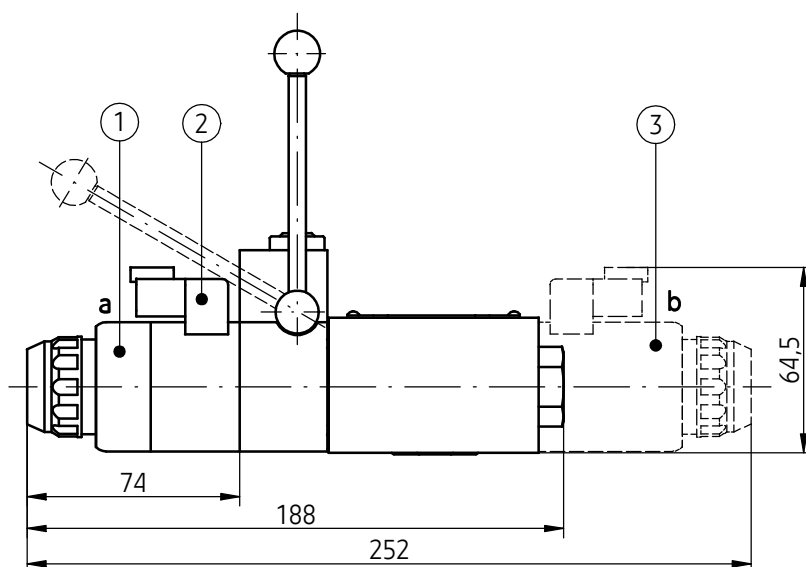

NOTE:

Other dimensions, description of elements of the valve drawing, porting pattern and requirements of surface state of the subplate - as in version WE6.../...H...Z4..., see page 7

1 - Solenoid on side **a**

2 - Solenoid on side **b**

3 - **Deutsch DT04 - 2P** type connector


(plug-in connectors **Deutsch DT06 - 2S** type not shown in the drawing must be ordered separately - Data Sheet **WK 499 963**)

PERFORMANCE CURVES

measured at viscosity $\nu = 41 \text{ mm}^2/\text{s}$ and temperature $t = 50^\circ\text{C}$

Flow resistance curves



characteristic curves $\Delta p(Q)$ for directional spool valve type WE6... for various spool types

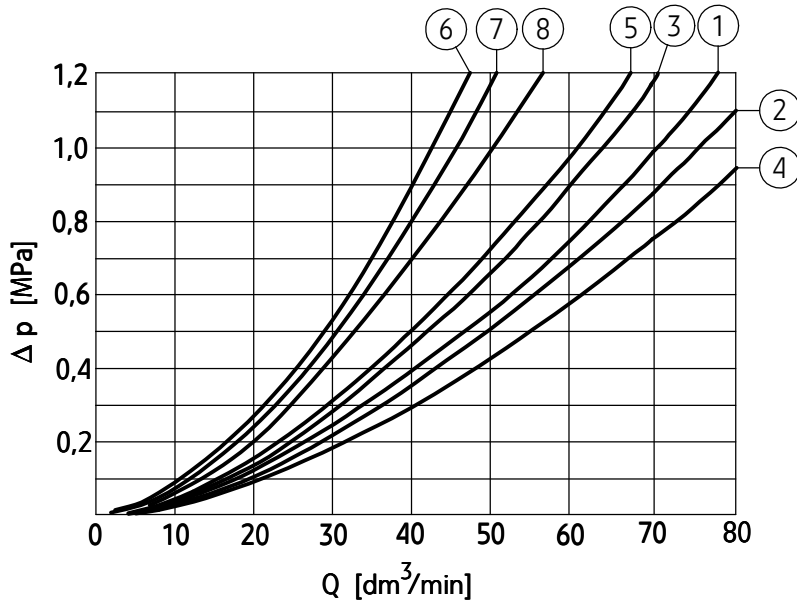

spool symbol	performance diagram number			
	flow direction			
shifted positions diagrams according to pages 4, 5	P → A	P → B	A → T	B → T
A, B	3	3	-	-
C	1	1	3	1
D, Y	5	5	3	3
E	3	3	1	1
F	2	3	3	5
G	7	7	6	6
H	2	4	2	2
J	1	1	2	1
L, W	1	1	2	2
M	2	4	3	3
P	2	3	3	5
U	3	1	3	3
D1	5	-	-	5
Y1	-	5	5	-
central position diagram according to page 4	flow direction			
	P → A	P → T	A → T	B → A
G	-	8	-	-

Operating limits

characteristic curves $p-Q$ for directional spool valve type WE6... with DC solenoids for various spool types

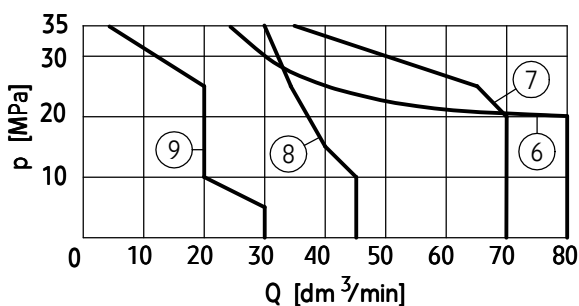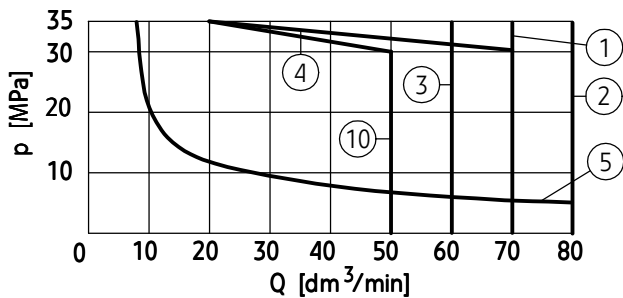

NOTES:

Above operating limits are related to symmetrical flow through all ports i.e. if the oil flows from port **P** to port **A**, then the same flow rate is from port **B** to port

T (applied to directional control valves with 4 service ports). Degree of asymmetry affects adversely the parameters.


spool symbol diagrams according to pages 4, 5	performance diagram number
E	1
H, M, L, U, C/OF, D/OF	2
C/O, D/O	3
C, D, Y	4
A, B	5
A/O	6
J	7
G	8
F, P	9
D1, Y1	10

PERFORMANCE CURVES


measured at viscosity $\nu = 41 \text{ mm}^2/\text{s}$ and temperature $t = 50^\circ\text{C}$

Operating limits

characteristic curves p-Q for directional spool valve type WE6... with AC solenoids with direct supply for various spool types

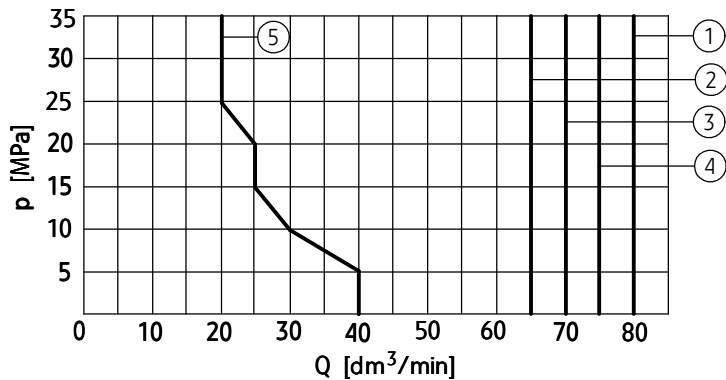

spool symbol diagrams according to pages 4, 5	performance diagram number
C, D, H, D/O, C/OF, D/OF	1
W	2
E	3
L	4
G	5
J	6
M	7
A	8

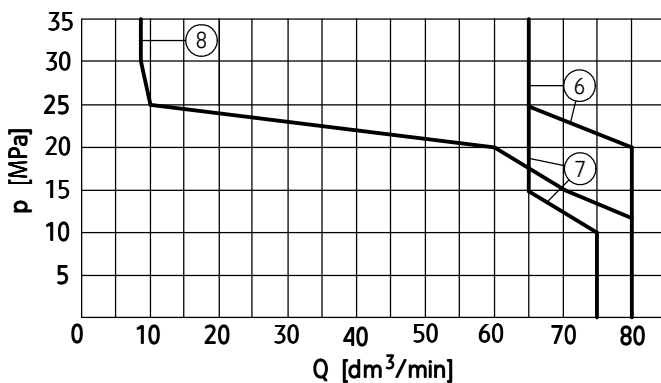

NOTES:

Above operating limits are related to symmetrical flow through all ports i.e. if the oil flows from port **P** to port **A**, then the same flow rate is from port **B** to port

T (applied to directional control valves with 4 service ports). Degree of asymmetry affects adversely the parameters.

ACCESSORIES


Spool position switch type S

Additional technical data


Inductive switch type S		
Versions	PNP inductive proximity switches normally closed - NC normally opened - NO	
Range of supply voltage for switch	10 - 30V DC	
Max load current	200 mA	
Connection type of switch	switch with M12x1 external thread; male connection; 4 contacts (pins)	
Degree of protection	IP 65	
Weight	directional valve with 1 solenoid and 1 switch	2,1 kg
	directional valve with 2 solenoids and 1 switch	2,7 kg
	directional valve with 2 solenoids and 2 switches	3,3 kg

Diagrams of electrical connection of inductive switch type S


normally open (NO) - type S1

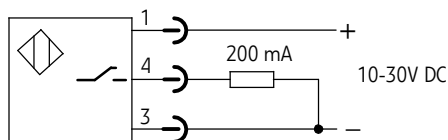

normally closed (NC) - typ S2

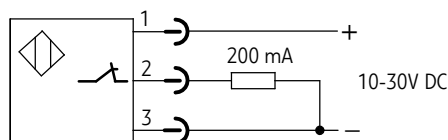

contact allocation (pins of switch connector)



Diagrams for directional control valves and initial positions of switches

initial position of inductive switch type S depending on the spool position 0 - off neutral state on output contact (NO - contact 4; NC - contact 2) 1 - on state on uotput contact (NO - contact 4; NC - contact 2)	diagram for directional control valve
3-position directional control valve	
<p>position monitored a and b</p> <p>switch type S1</p> <p>switch on side a</p> <p>switch on side b</p> <p>100 50 0 50 100</p> <p>a spool position [%] b</p> <p>switch type S2</p> <p>switch on side a</p> <p>switch on side b</p> <p>100 50 0 50 100</p> <p>a spool position [%] b</p>	<p>position monitored 0</p> <p>switch type S1</p> <p>switch on side a</p> <p>switch on side b</p> <p>100 50 0 50 100</p> <p>a spool position [%] b</p> <p>switch type S2</p> <p>switch on side a</p> <p>switch on side b</p> <p>100 50 0 50 100</p> <p>a spool position [%] b</p> <p>A B</p> <p>a 0 b</p> <p>P T</p>

ACCESSORIES

Spool position switch type S


initial position of inductive switch depending on the spool position		diagram for directional control valve
2-position versions WE6...A... (positions: a, 0) solenoid and switch on side a		
<p style="text-align: center;">position monitored a</p>	<p style="text-align: center;">position monitored 0</p>	
2-position versions WE6...B... (positions: 0, b) solenoid and switch on side b		
<p style="text-align: center;">position monitored 0</p>	<p style="text-align: center;">position monitored b</p>	
2-position versions WE6A...; ...C...; ...D...; .../O...; .../OF... switch on side a		
<p style="text-align: center;">position monitored a</p>	<p style="text-align: center;">position monitored b</p>	
2-position versions WE6B...; ...Y... switch on side b		
<p style="text-align: center;">position monitored a</p>	<p style="text-align: center;">position monitored b</p>	

ACCESSORIES


Spool position switch type S

Overall dimensions


version with 2 solenoids and 2 switches

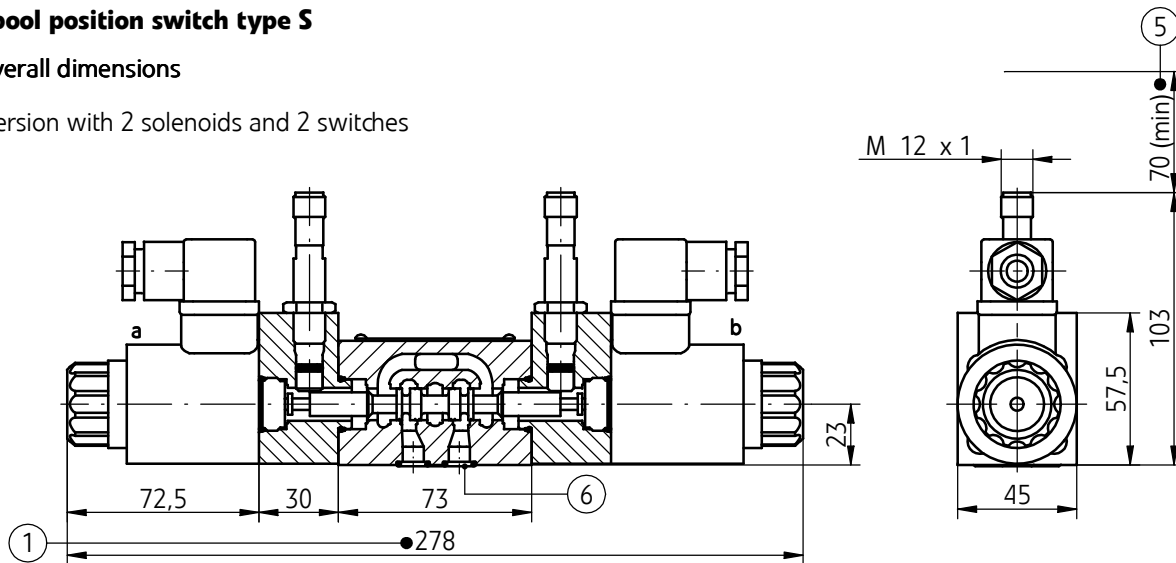

version with 1 solenoid and 1 switch

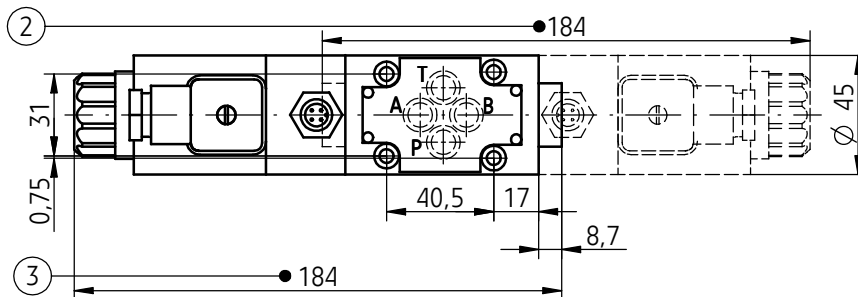

version with 2 solenoids and 1 switch

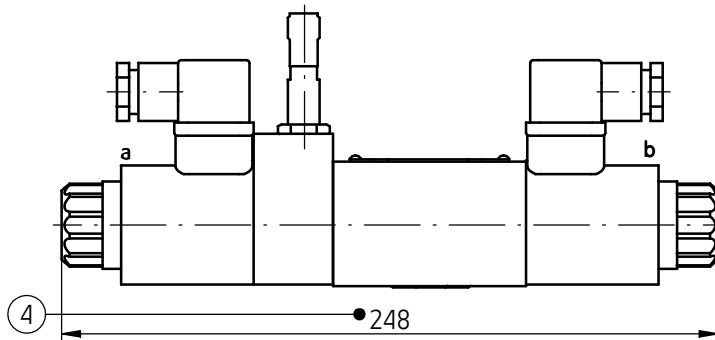

NOTES:

Directional control valve with spool position switch is adjusted. Any adjustments may be made only by the manufacturer.

In case of a faulty switch or valve complete directional control valve must be changed.

Requirements of surface state of the subplate - according to page 6

- 1 - Dimension of directional control valve with **2 solenoids** - on side **a, b** and **2 position switches**
 - **3-position, springs centered**

versions WE6.../...S1...; ...S2... (spool diagrams: E, F, G, H, J, L, M, P, U, W - on page 4)
- 2 - Dimension of directional control valve with **1 solenoid** - on side **a** and **1 position switch**
 - **2-position, with return spring**

versions WE6.../...S1...; ...S2... (spool diagrams: A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA - on pages 4, 5)
- 3 - Dimension of directional control valve with **1 solenoid** - on side **b** and **1 position switch**
 - **2-position, with return spring**

versions WE6.../...S1... ...S2... (spool diagrams:

B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB
- on pages 4, 5)

- 4 - Dimension of directional control valve with **2 solenoids** - on side **a, b** and **1 position switch** on side **a**
 - **2-position, without spring return**

versions WE6.../O...S1...; ...S2...
 - **2-position, without spring return, with detent**

versions WE6.../OF...S1...; ...S2... (spool diagrams: A, C, D, D1 - on page 5)
- 5 - Distance for mounting plug-in-connector and cable of switch (plug-in-connectors not showed in the drawing must be ordered separately according to data sheet **WK 499 963**)
- 6 - **O - ring 9,2 x 1,8** - 4pcs/set (P, T, A, B)

ACCESSORIES


Spool position switch type M

(only for 2-position versions with return spring)


Additional technical data

Inductive switch type M	
	czujnik z 2 alternatywnymi wyjściami typu PNP: normally closed - contact 2 normally open - contact 4
Range of supply voltage for switch	20 - 32 VDC
Max load current	400 mA
Connection type of switch	switch with M12 x 1 external thread; 4 contacts (pins)
Degree of protection	IP 65
Weight (directional valve with switch)	1,8 kg

Diagram of electrical connection of inductive switch type M

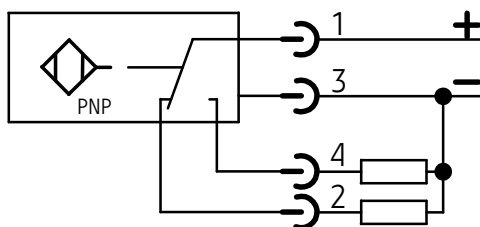

contact allocation (pins of switch connector)



Diagrams for directional control valves and initial positions of switches

initial position of inductive switch type M depending on the spool position 0 - off neutral state on output contact 1 - on state on output contact		diagram for directional control valve
2-position versions WE6...A... (positions: a, 0) solenoid on side a and switch on side b		
<p>position monitored a</p>	<p>position monitored 0</p>	
2-position versions WE6...B... (positions: 0, b) solenoid on side b and switch on side a		
<p>position monitored 0</p>	<p>position monitored b</p>	

ACCESSORIES

Spool position switch type M

(only for 2-position versions with return spring)

Diagrams for directional control valves and initial positions of switches


initial position of inductive switch type M depending on the spool position 0 - off neutral state on output contact 1 - on state on uotput contact		diagram for directional control valve
2-position versions WE6A...; ...C...; ...D...; ...D1... switch on side b		
<p>position monitored a</p>	<p>position monitored b</p>	
2-position versions WE6B...; ...Y...; ...Y1... switch on side a		
<p>position monitored a</p>	<p>position monitored b</p>	

ACCESSORIES


Spool position switch type M

Overall dimensions

version with solenoid on side **a** and switch type M

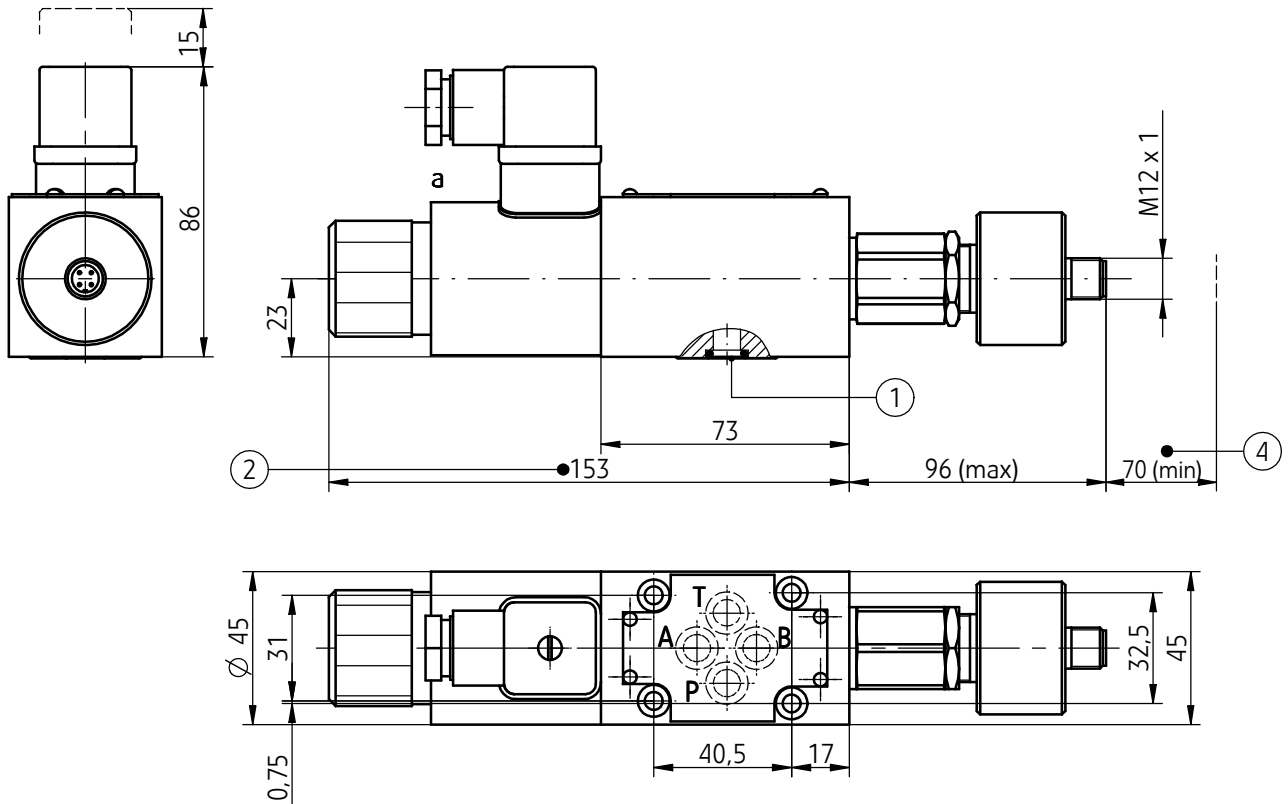

version with solenoid on side **b** and switch type M

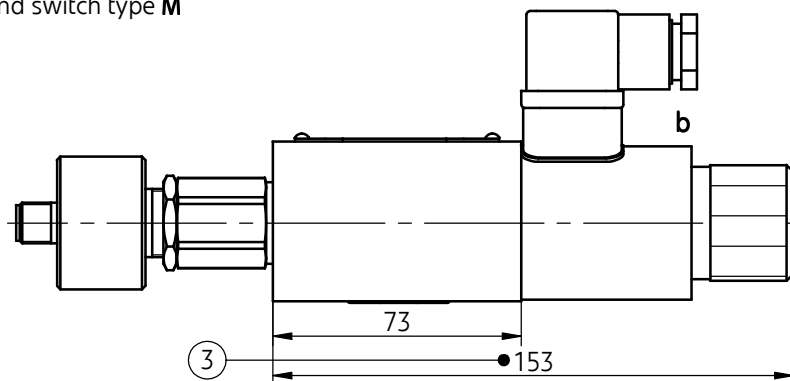

Requirements of surface state of the subplate - according to page 6

NOTES:

Directional control valve with spool position switch is adjusted. Any adjustments may be made only by the manufacturer.

In case of a faulty switch or valve complete directional control valve must be changed.

- 1 - O-ring 9,2 x 1,8 - 4 pcs/set (P,T, A, B)
- 2 - Dimension of directional control valve 2-position, with return spring with 1 solenoid - on side **a** and switch type M (spool diagrams: A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA - on page 4, 5)
- 3 - Dimension of directional control valve 2-position, with return spring with 1 solenoid - on side **b** and switch type M (spool diagrams: B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB - on page 4, 5)
- 4 - Distance for mounting plug-in-connector and cable of switch (plug-in-connectors not showed in the drawing must be ordered separately according to data sheet **WK 499 963**)

HOW TO ORDER

	WE	6	+	/							+
--	-----------	----------	----------	----------	--	--	--	--	--	--	----------

Number of service ports

3-way - only for spools A, B = **3**

4-way - for the other spools = **4**

Nominal size (NS)

NS6 = **6**

Spool symbol

spool diagrams - according to **page 4, 5**

Series number

(30-39) - connection and installation dimensions unchanged = 3X
series 32 = **32**

Spool positioning

spring centering = **no designation**

without springs return (only for spools A, C, D) = 0

without springs return with detent (only for spools A, C, D) = OF

Control voltage for solenoids

12V DC = G12

24V DC = **G24**

110V DC = G110

110V AC 50Hz (plug-in-connector with rectifier) = W110R

220V AC 50Hz (plug-in-connector with rectifier) = W220R

230V AC 50Hz (plug-in-connector with rectifier) = **W230R**

230V AC 50 Hz (direct supply with AC current) = W230-50

Manual override

solenoids with manual override = **N**

solenoids without manual override (only for version with inductive switch type M) = no designation

Manual lever control

no manual control lever = **no designation**

with a manual control lever positioned vertically = H

with a manual control lever positioned at an angle = HS

Electrical connection

plug-in-connector type ISO 4400 (DIN 43650 - A) without LED = **Z4**

plug-in-connector type ISO 4400 with LED = Z4L

withput plug-in-connector, with 2-poles male AMP Junior Timer type connector (exists for ...G12... and ...G24... options only) = J

withput plug-in-connector, with DEUTSCH type connector (exists for ...G24... option only) = D

Throttle insert (in port P)

without throttle insert = **no designation**

throttle insert ϕ 0,8 = B 08

throttle insert ϕ 1,0 = B 10

throttle insert ϕ 1,2 = B 12

HOW TO ORDER

	+		★
--	---	--	---

Further requirements in clear text
(to be agreed with the manufacturer)

Monitored position of the spool

monitored position **0** - zero (*3- position and 2- position versions with positions (a, 0) or (0, b)*) = 0

monitored position **a** (*2- position versions with positions (a, 0) or (a, b)*) = A

monitored position **b** (*2- position versions with positions (0, b) or (a, b)*) = B

monitored position **a** and **b** (*3- position versions*) = AB

Spool position switch

spool position switch type **S1** = S1

spool position switch type **S2** = S2

spool position switch type **M** (only for 2-positions versions with return spring) = M

NOTES:

Optional version with a spool position switch and a manual control lever (options ...H...; ...HS...) available after consultation with the manufacturer.

Sealing

NBR (for fluids on mineral oil base) = no designation

FKM (for fluids on phosphate ester base) = V


NOTES:

Directional spool valve should be ordered according to the above coding.

The symbols in bold are preferred versions in short delivery time.

Coding example: 4WE6 E - 32/G24 N Z4 B08 S1 - AB

EXAMPLE OF APPLICATION IN HYDRAULIC SYSTEM

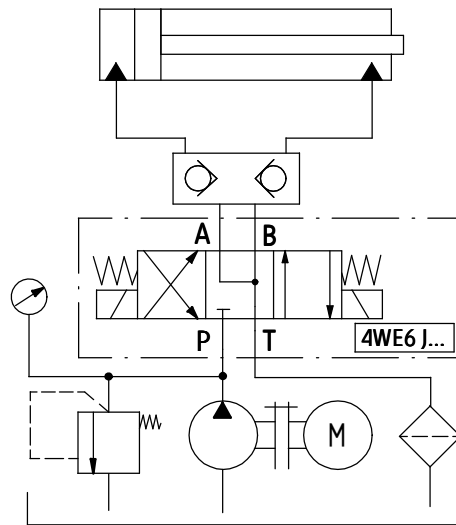

SUBPLATES AND FIXING SCREWS

Subplates must be ordered according to catalogue sheet **WK 496 480**. Subplate symbols:

G 341/01 - threaded connections G 1/4

G 342/01 - threaded connections **G 3/8**

G 502/01 - threaded connections G 1/2

G 341/02 - threaded connections M14 x 1,5

G 342/02 - threaded connections M16 x 1,5

Subplates and screws fixing directional valve **M5 x 50 - 10,9** in accordance with **PN - EN ISO 4762** - 4 pcs/set) must be ordered separately.

Tightening torque **Md = 9 Nm**

The subplate symbol in bold is the preferred version available in short delivery time.

PONAR Wadowice S.A.
ul. Wojska Polskiego 29
34-100 Wadowice
tel. +48 33 488 21 00
fax. +48 33 488 21 03
www.ponar-wadowice.pl

