

TECHNICAL DATA



Max. Operating pressure: 350 bar

Rated flow: 60 l/min

Cavity-Tooling: 11A-3

Installation torque: 40-50 Nm

Weight: 0.12 kg

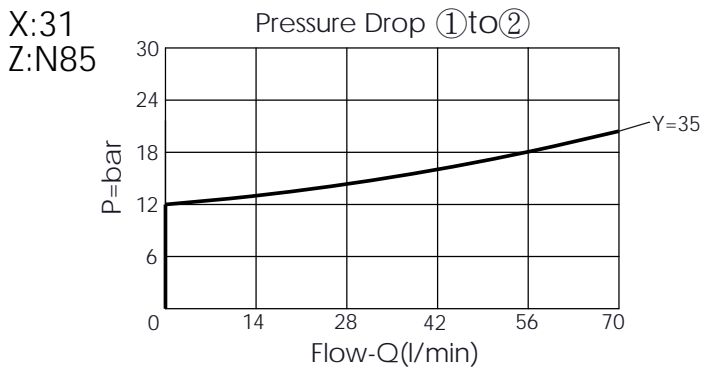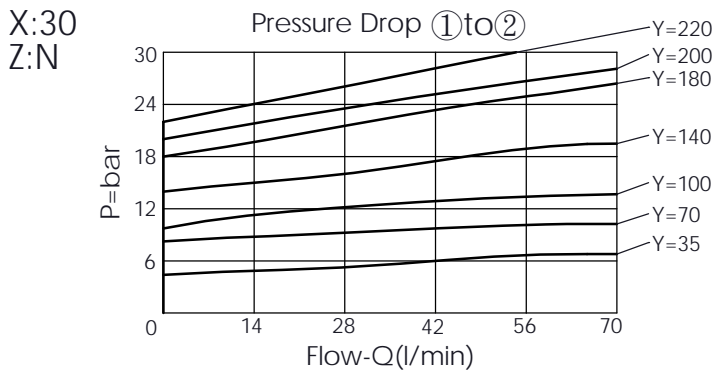

X	OPERATION	
30	External Pilot (bypass compensator)	
31	Internal Pilot (Port 1 to Port 3) (mainstage relief element)	

Y	SPRINGS	
	Cracking pressure	
10	1.0 bar	(Only X=31)
35	3.5 bar	
70	7.0 bar	
100	10.0 bar	
140	14.0 bar	
180	18.0 bar	
200	20.0 bar	
220	22.0 bar	

Z	OPTION	
N	Non-adjustable	
N85	Fast-acting (Only X=31)	