


Not all variances of ordering codes can be offered. Please check available part numbers first. For not yet implemented part numbers or special requests please contact Parker Hannifin.

1) Only coded for the last section.

Ordering code

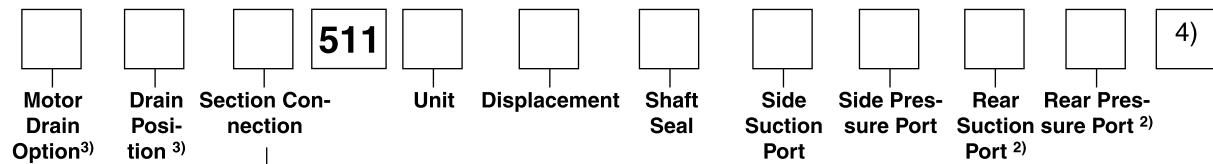

Code	Section Connection
S	Separate inlets
C	Common inlets

Code	Drain Position
2	Drain on bottom
3	Drain on top
4	Rear drain
5	Drain right view on drive shaft
6	Drain left view on drive shaft

Code	Motor Drain Option
B1	no drain
A <sup>2)</sup>	7/16-20 UNF thread
C	9/16-18 UNF thread
G	1/4 BSP thread
N <sup>2)</sup>	M10x1 metric thread
P <sup>2)</sup>	M12x1.5 metric thread

2) Non standard, on request only

Code	Flange
D3	71.4x96.0 - Ø36.47 rectangular
D4	72.0x100.0 - Ø80 rectangular
H2	106.4 - Ø82.55 SAE "A" 2 bolt flange
H3	146.1 - Ø101.6 SAE "B" 2 bolt flange
Q1 <sup>2)</sup>	60.0x60.0 - Ø52.0 w/o seal ,O' thrubolt flange
Q2	60.0x60.0 - Ø50.0 w. seal ,O' thrubolt flange
Q3 <sup>2)</sup>	60.0x60.0 - Ø52.0 w/o seal ,O' thrubolt flange
Q4	60.0x60.0 - Ø50.0 w. seal ,O', thrubolt flange
F4	72.0x100.0 - Ø80.0 rect., w. OBB and cont. drive shaft
C3	80x80 - Ø80.0 4 bolt flange

2) Non standard, on request only

Code	Port Options	Code	Port Options
B1	No ports	L1*	13 mm-Ø30 mm-M6 diamond
D2 <sup>2)</sup>	9/16 - 18 UNF thread	L2*	19 mm-Ø40 mm-M8 diamond
D3 <sup>2)</sup>	3/4 - 16 UNF thread	N1 <sup>2)</sup> *	1/2"-5/16-18UNC SAE Split Flange
D4 <sup>2)</sup>	7/8 - 14 UNF thread	N2 <sup>2)</sup> *	3/4"-3/8-16UNC SAE Split Flange
D5 <sup>2)</sup>	1 1/16 - 12 UN thread	N3 <sup>2)</sup> *	1"-3/8-16UNC SAE Split Flange
D6 <sup>2)</sup> *	1 5/16 - 12 UN thread	N4 <sup>2)</sup> *	1 1/4"-7/16-14UNC SAE Split Flange
D7 <sup>2)</sup> *	1 5/8 - 12 UN thread	P1*	12.7 mm - M8 1/2" Metric Split Flange
E2	3/8 - 19 BSP thread	P2*	19.0 mm - M10 3/4" Metric Split Flange
E3	1/2 - 12 BSP thread	P3*	25.4 mm - M10 1" Metric Split Flange
E4*	5/8 - 14 BSP thread	P4*	31.8 mm - M10 1 1/4" Metric Split Flange
E5*	3/4 - 14 BSP thread		
E6*	1 - 11 BSP thread		
E7*	1 1/4 - 11 BSP thread		
G1 <sup>2)</sup>	M14x1.5 thread		
G3 <sup>2)</sup>	M18x1.5 thread		
G4 <sup>2)</sup>	M22x1.5 thread		
G5 <sup>2)</sup> *	M26x1.5 thread		
G7 <sup>2)</sup> *	M30x1.5 thread		
J3 <sup>2)</sup> *	8 mm - Ø30 mm - M6 square		
J4 <sup>2)</sup> *	12 mm - Ø30 mm - M6 square		
J5*	15 mm - Ø35 mm - M6 square		
J6 <sup>2)</sup> *	15 mm - Ø40 mm - M8 square		
J7*	20 mm - Ø40 mm - M6 square		
J8*	18 mm - Ø55 mm - M8 square		
J9*	26 mm - Ø55 mm - M8 square		

2) Non standard, on request only

\*) Not usable for rear ports

3) Only for motors

4) For further "B" triple unit repeat displacement, shaft seal between sections, side suction port, side pressure port, rear suction port, rear pressure port.