



**AMP-stik til PVE serie 3**  
**AMP connector for PVE series 3**  
**AMP-Stecker für PVE Serie 3**  
**Kit AMP pour PVE serie 3**

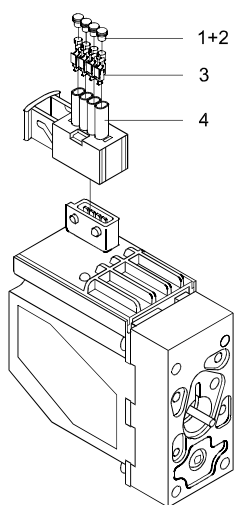

157-361.12

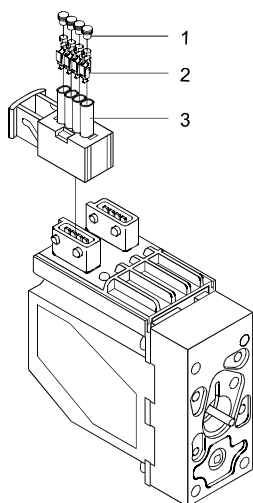

157-377.12

**PVE function (grey)**

Pos.	Description	Qty.	AMP Code No.	Code No.	Code No. with 4 m cable
1	Wire sealing (blue)	4*	828904-1	157B4992 min.100 pcs.	157B4994 min. 50 pcs.
2	Blind plug (transparent)	1	828922-1		
3	JPT contact (loose piece)	4*	929930-1		
4	JPT housing keying B (gray)	1	2-967059-1		

JPT = AMP Junior Power Timer


## PVE Serie 3

**DI function (black)**

Pos.	Description	Qty.	AMP Code No.	Code No.	Code No. with 4 m cable
1	Wire sealing (blue)	4	828904-1	157B4993 min.100 pcs.	157B4995 min. 50 pcs.
2	JPT contact (loose piece)	4	929930-1		
3	JPT housing keying A (black)	1	1-967059-1		

AMP crimp tool incl. crimp insert for JPT-contact	157B4989
---	----------

Åbning af AMP-stik  
 Opening of AMP-connector  
 Öffnen des AMP-Steckers  
 Ouverture des kit AMP

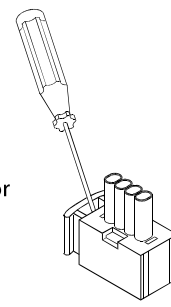


157-378.10

**Kabel med stik**  
**Cable with connector**  
**Kabel mit Stecker**  
**Câble avec connecteur**

PVE-funktion (gråt stik)  
 PVE-function (grey connector)  
 PVE-Funktion (Grauer Stecker)  
 PVE-Fonction (Support gris)

Code: 157B4994  
 (min. 50 pcs.)

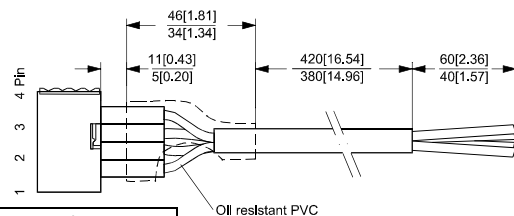


157-376.10

Pin 1	Hvid, White, Weiß, Blance
Pin 2	Blå, Blue, Blau, Bleu
Pin 3	Gul, Yellow, Gelb, Jaune
Pin 4	Rød, Red, Rot, Rouge

DI-funktion (sort stik)  
 DI-function (black connector)  
 DI-Funktion (Schwarzer Stecker)  
 DI-fonction (Support noir)

Code: 157B4995  
 (min. 50 pcs.)

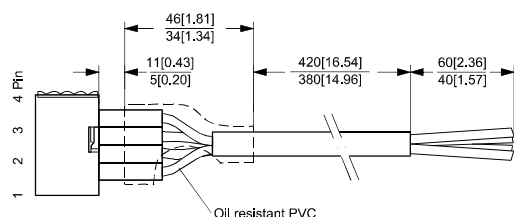

157-376.10